

Resonant Lamp Ballast Controller

FEATURES

- Controls Different Types of Lamps: Cold Cathode Fluorescent, Neon, and Gas Discharge
- Zero Voltage Switching (ZVS) of Push-Pull Drivers
- Accurate Control of Lamp Current
- Variable Lamp Intensity Control
- 1 μ A Disable Current
- 4.5V to 24V Operation
- Open Lamp Detection Circuitry


DESCRIPTION

The UC3872 is a resonant lamp ballast controller optimized for driving cold cathode fluorescent, neon, and other gas discharge lamps. The resonant power stage develops a sinusoidal lamp drive voltage, and minimizes switching loss and EMI generation. Lamp intensity adjustment is accomplished with a buck regulator, which is synchronized to the external power stage's resonant frequency. Suitable for automotive and battery powered applications, the UC3872 draws only 1 μ A when disabled.

Soft start and open lamp detect circuitry have been incorporated to minimize component stresses. Open lamp detection is enabled at the completion of a soft start cycle. The chip is optimized for smooth duty cycle control to 100%.

Other features include a precision 1.2% reference, undervoltage lockout, and accurate minimum and maximum frequency control.

BLOCK DIAGRAM

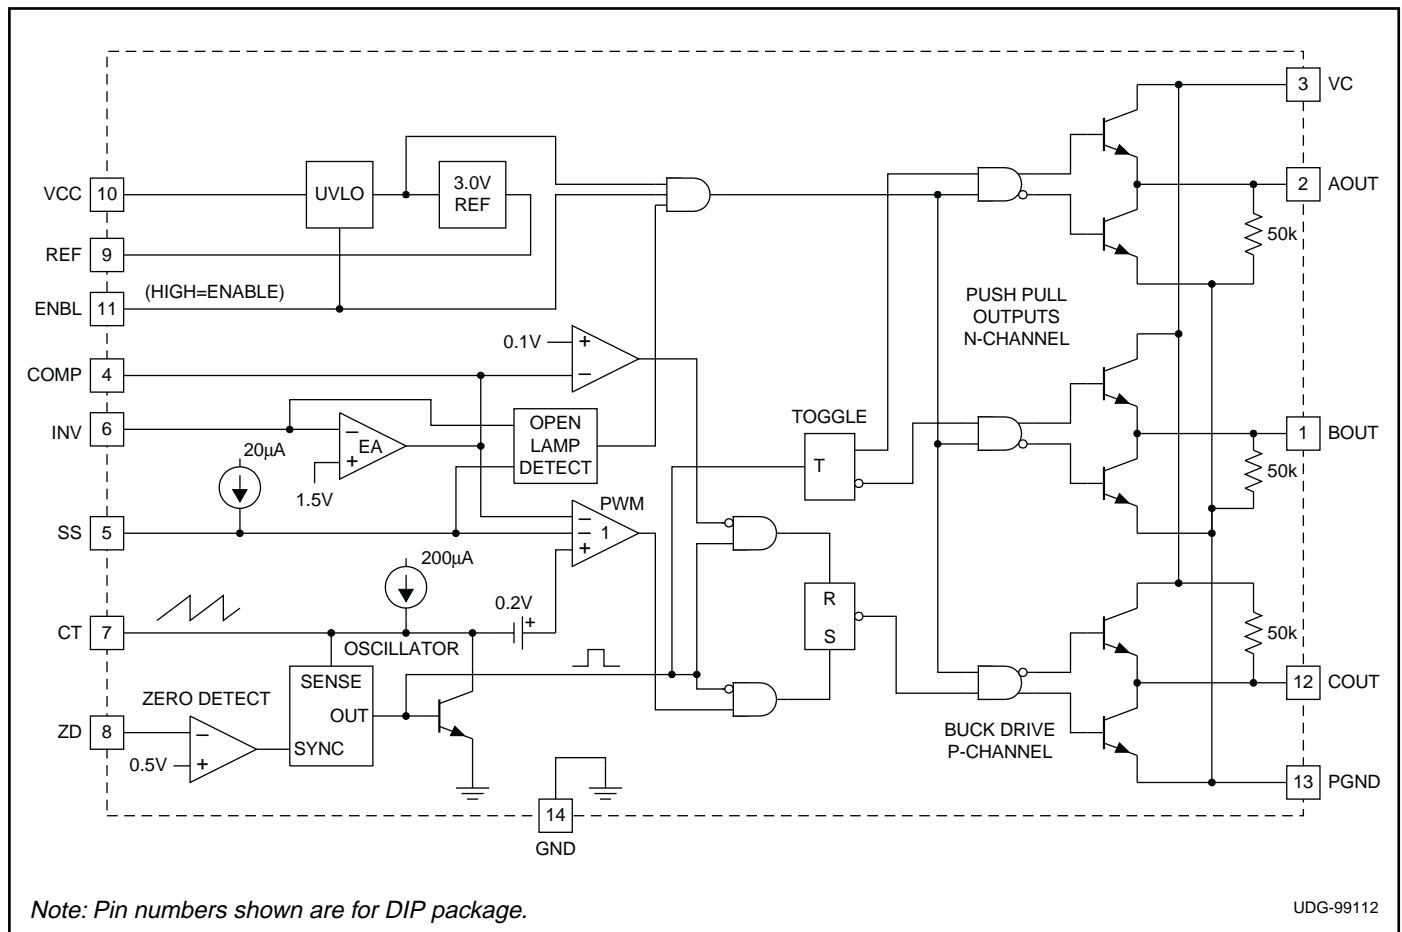

ABSOLUTE MAXIMUM RATINGS


Analog Inputs -0.3 to +10V
VCC, VC Voltage. +24V
ZD Input Current
 High Impedance Source +10mA
ZD Input Voltage
 Low Impedance Source +24V
Power Dissipation at TA = 25°C 1W
Storage Temperature -65°C to +150°C
Lead Temperature. 300°C

Note 1: Currents are positive into, negative out of the specified terminal.


Note 2: Consult Packaging Section of Databook for thermal limitations and considerations of package.

CONNECTION DIAGRAMS


SOIC-16, SSOP-16 (TOP VIEW) DW, M Package

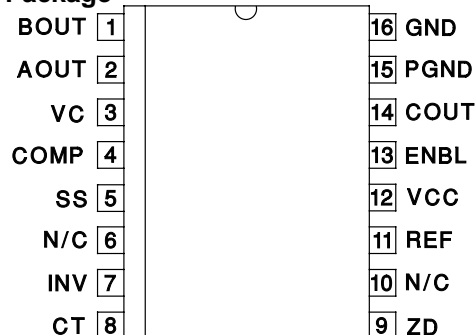

DIL-14 (TOP VIEW) N Package

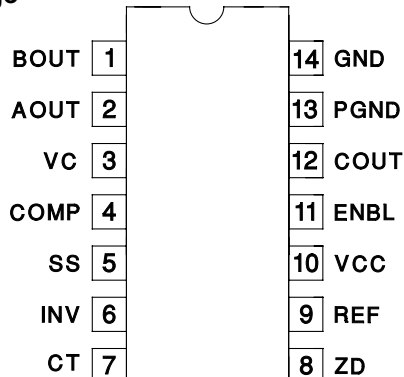

PLCC-20 (Top View) Q Package

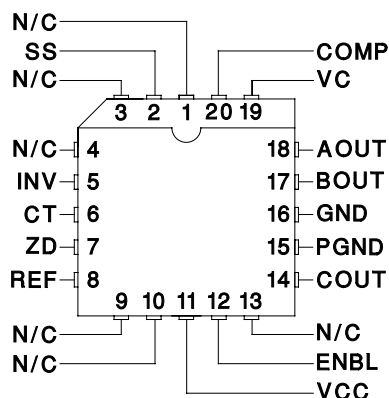

ELECTRICAL CHARACTERISTICS: Unless otherwise stated, these parameters apply for TJ = -55°C to +125°C for the UC1872, -40°C to +85°C for the UC2872, -0°C to +70°C for the UC3872; VCC= 5V, VC = 15V, VENBL = 5V, CT = 1nF, ZD = 1V.

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|-----------------------------------|--------------------|-------|-------|-------|-------|
| Reference Section | | | | | |
| Output Voltage | TJ = 25°C | 2.963 | 3.000 | 3.037 | V |
| | Over Temperature | 2.940 | 3.000 | 3.060 | V |
| Line Regulation | VCC = 4.75V to 18V | | | 10 | mV |
| Load Regulation | IO = 0 to -5mA | | | 10 | mV |
| Oscillator Section | | | | | |
| Free Running Frequency | TJ = 25°C | 57 | 68 | 78 | kHz |
| Maximum Synchronization Frequency | TJ = 25°C | 160 | 200 | 240 | kHz |
| Charge Current | VCT = 1.5V | 180 | 200 | 220 | μA |
| Voltage Stability | | | | 2 | % |
| Temperature Stability | | | 4 | 8 | % |
| Zero Detect Threshold | | 0.46 | 0.5 | 0.56 | V |
| Error Amp Section | | | | | |
| Input Voltage | VO = 2V | 1.445 | 1.475 | 1.505 | V |
| Input Bias Current | | | -0.4 | -2 | μA |
| Open Loop Gain | VO = 0.5 to 3V | 65 | 90 | | dB |
| Output High | VINV = 1.3V | 3.1 | 3.5 | 3.9 | V |

ELECTRICAL CHARACTERISTICS: Unless otherwise stated, these parameters apply for $T_J = -55^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ for the UC1872, -40°C to $+85^{\circ}\text{C}$ for the UC2872, -0°C to $+70^{\circ}\text{C}$ for the UC3872; $V_{CC} = 5\text{V}$, $V_C = 15\text{V}$, $V_{ENBL} = 5\text{V}$, $C_T = 1\text{nF}$, $Z_D = 1\text{V}$.

| PARAMETER | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|--------------------------------------|--|------|------|--------------------|---------------|
| Error Amp Section (cont.) | | | | | |
| Output Low | $V_{INV} = 1.7\text{V}$ | | 0.1 | 0.2 | V |
| Output Source Current | $V_{INV} = 1.3\text{V}$, $V_O = 2\text{V}$ | -350 | -500 | | μA |
| Output Sink Current | $V_{INV} = 1.7\text{V}$, $V_O = 2\text{V}$ | 10 | 20 | | mA |
| Common Mode Range | | 0 | | $V_{IN}-1\text{V}$ | V |
| Unity Gain Bandwidth | $T_J = 25^{\circ}\text{C}$ (Note 4) | | 1 | | MHz |
| Open Lamp Detect Section | | | | | |
| Soft Start Threshold | $V_{INV} = 0\text{V}$ | 2.9 | 3.4 | 3.8 | V |
| Open Lamp Detect Threshold | $V_{SS} = 4.2\text{V}$ | 0.6 | 1.0 | 1.4 | V |
| Soft Start Current | $V_{SS} = 2\text{V}$ | 10 | 20 | 40 | μA |
| Output Section | | | | | |
| Output Low Level | $I_{OUT} = 0$, Outputs A and B | | 0.05 | 0.2 | V |
| | $I_{OUT} = 10\text{mA}$ | | 0.1 | 0.4 | V |
| | $I_{OUT} = 100\text{mA}$ | | 1.5 | 2.2 | V |
| Output High Level | $I_{OUT} = 0$, Output C | 13.9 | 14.9 | | V |
| | $I_{OUT} = -10\text{mA}$ | 13.5 | 14.3 | | V |
| | $I_{OUT} = -100\text{mA}$ | 12.5 | 13.5 | | V |
| Rise Time | $T_J = 25^{\circ}\text{C}$, $C_I = 1\text{nF}$ (Note 4) | | 30 | 80 | ns |
| Fall Time | $T_J = 25^{\circ}\text{C}$, $C_I = 1\text{nF}$ (Note 4) | | 30 | 80 | ns |
| Output Dynamics | | | | | |
| Out A and B Duty Cycle | | 48 | 49.9 | 50 | % |
| Out C Max Duty Cycle | $V_{INV} = 1\text{V}$ | 100 | | | % |
| Out C Min Duty Cycle | $V_{INV} = 2\text{V}$ | | | 0 | % |
| Under Voltage Lockout Section | | | | | |
| Startup Threshold Voltage | | 3.7 | 4.2 | 4.5 | V |
| Hysteresis | | 120 | 200 | 280 | mV |
| Enable Section | | | | | |
| Input High Threshold | | 2 | | | V |
| Input Low Threshold | | | | 0.8 | V |
| Input Current | $V_{ENBL} = 5\text{V}$ | | 150 | 400 | μA |
| Supply Current Section | | | | | |
| VCC Supply Current | $V_{CC} = 24\text{V}$ | | 6 | 14 | mA |
| VC Supply Current | $V_C = 24\text{V}$ | | 5 | 12 | mA |
| ICC Disabled | $V_{CC} = 24\text{V}$, $V_{ENBL} = 0\text{V}$ | | 1 | 10 | μA |

Note 3: Unless otherwise specified, all voltages are with respect to ground. Currents are positive into, and negative out of the specified terminal.

Note 4: Guaranteed by design. Not 100% tested in production.

PIN DESCRIPTIONS

AOUT, BOUT: These outputs provide complementary drive signals for the push-pull N-channel MOSFETs. Each one is high for 50% of the time, switching states each time a zero-detect is sensed.

COMP: COMP is the output terminal of the error amplifier. Compensation components are normally connected between COMP and INV. Connecting a capacitor from this pin to ground limits turn on current and blanks the open lamp detect signal allowing the lamp to start.

COUT: This output directly drives the bulk regulator P-channel MOSFET. COUT turn-on is synchronized to each zero-detect, and therefore switches at twice the frequency of AOUT and BOUT. The modulator controlling COUT is designed to provide smooth control up to 100% duty cycle.

CT: A capacitor connected between this pin and GND ground sets the synchronization frequency range. The capacitor is charged with approximately 200 μ A, creating a linear ramp which is used by COUT's (buck regulator driver) PWM comparator.

ENBL: When ENBL is driven high the device is enabled. When ENBL is pulled low, the IC is shut down and typically draws 1 μ A.

GND: This pin is the ground reference point for the internal reference and all thresholds.

INV: This pin is the inverting input to the error amplifier and the input for the open lamp detect circuitry. If the voltage at INV is below the 1V open lamp detect threshold, the outputs are disabled.

PGND: This pin is the high current ground connection for the three output drivers.

REF: This pin is connected to the 3V reference voltage which is used for the internal logic. Bypass REF to ground with a 0.01 μ F ceramic capacitor for proper operation.

VC: VC is the power supply voltage connection for the output drivers. Bypass it to ground with a 0.1 μ F ceramic capacitor for proper operation.

VCC: VCC is the positive supply voltage for the chip. Its operating range is from 4.2V to 24V. Bypass VCC to ground with a 0.1 μ F ceramic capacitor for proper operation.

ZD: The zero-detect input senses when the transformer's primary center tap voltage falls to zero to synchronize the sawtooth voltage waveform on CT. The threshold is approximately 0.5V, providing a small amount of offset such that with propagation delay, zero-volt switching occurs. A resistor (typically 10k) should be connected between ZD and the primary center tap to limit input current at turn off.

APPLICATION INFORMATION

Figure 1 shows a complete application circuit using the UC3872 Resonant Lamp Ballast Controller. The IC provides all drive, control and housekeeping functions. The buck output voltage (transformer center-tap) provides the zero crossing and synchronization signals.

The buck modulator drives a P-channel MOSFET directly, and operates over a 0-100% duty-cycle range. The modulation range includes 100%, allowing operation with minimal headroom.

The oscillator and synchronization circuitry are shown in Figure 2. The oscillator is designed to synchronize over a 3:1 frequency range. In an actual application however, the frequency range is only about 1.5:1. A zero detect comparator senses the primary center-tap voltage, generating a synchronization pulse when the resonant wave-

form falls to zero. The actual threshold is 0.5 volts, providing a small amount of anticipation to offset propagation delay.

The synchronization pulse width is the time required for the 4mA current sink to discharge the timing capacitor to 0.1 volts. This pulse width limits the minimum linear control range of the buck regulator. The 200 μ A current source charges the capacitor to a maximum of 3 volts. A comparator blanks the zero detect signal until the capacitor voltage exceeds 1 volt, preventing multiple synchronization pulse generation and setting the maximum frequency. If the capacitor voltage reaches 3 volts (a zero detection has not occurred) an internal clock pulse is generated to limit the minimum frequency.

APPLICATIONS INFORMATION

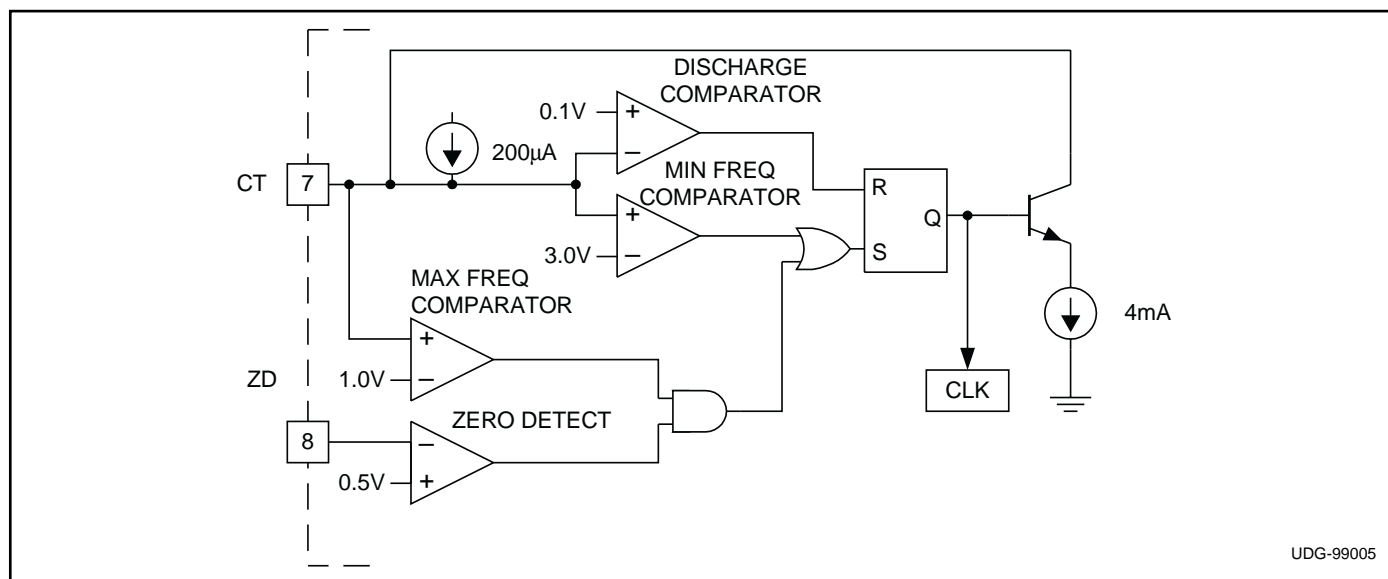


Figure 2. UC3872 oscillator section.

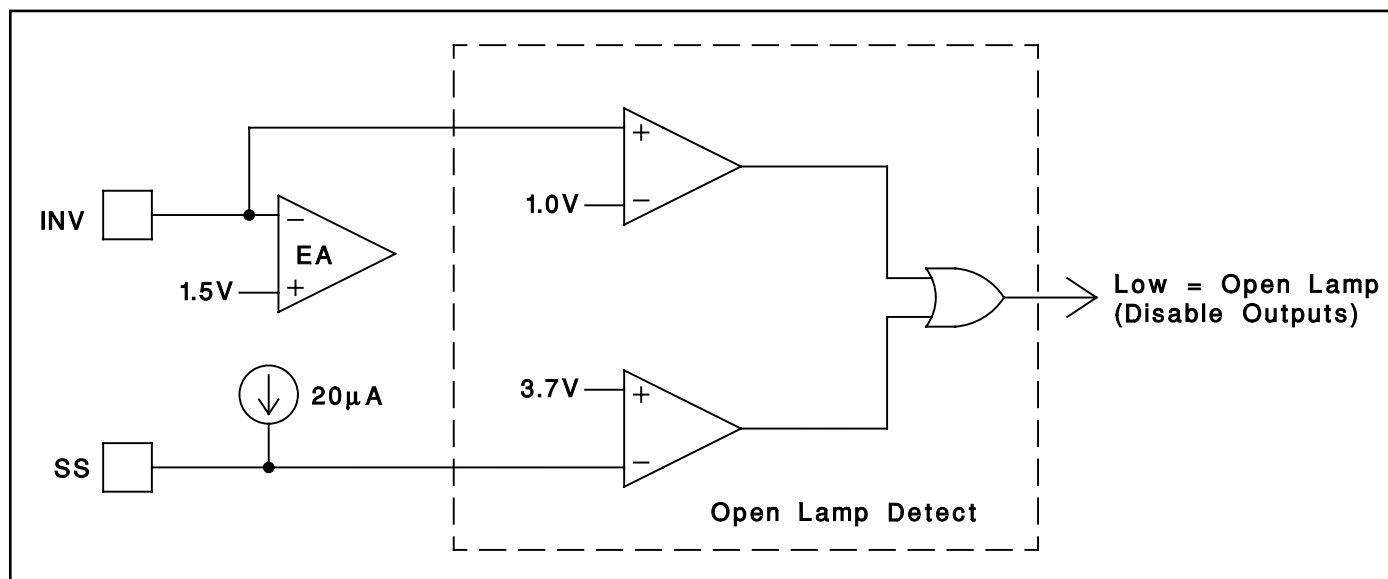


Figure 3. UC3872 open lamp detect circuitry.

PACKAGING INFORMATION

| Orderable part number | Status (1) | Material type (2) | Package Pins | Package qty Carrier | RoHS (3) | Lead finish/ Ball material (4) | MSL rating/ Peak reflow (5) | Op temp (°C) | Part marking (6) |
|----------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| UC2872DW | Active | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UC2872DW |
| UC2872DW.A | Active | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UC2872DW |
| UC2872DWTR | Active | Production | SOIC (DW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UC2872DW |
| UC2872DWTR.A | Active | Production | SOIC (DW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | -40 to 85 | UC2872DW |
| UC3872DW | Active | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872DW |
| UC3872DW.A | Active | Production | SOIC (DW) 16 | 40 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872DW |
| UC3872DWTR | Active | Production | SOIC (DW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872DW |
| UC3872DWTR.A | Active | Production | SOIC (DW) 16 | 2000 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872DW |
| UC3872M | Active | Production | SSOP (DBQ) 16 | 75 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872M |
| UC3872M.A | Active | Production | SSOP (DBQ) 16 | 75 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872M |
| UC3872MG4 | Active | Production | SSOP (DBQ) 16 | 75 TUBE | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872M |
| UC3872MTR | Active | Production | SSOP (DBQ) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872M |
| UC3872MTR.A | Active | Production | SSOP (DBQ) 16 | 2500 LARGE T&R | Yes | NIPDAU | Level-2-260C-1 YEAR | 0 to 70 | UC3872M |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| UC2872DWTR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| UC3872DWTR | SOIC | DW | 16 | 2000 | 330.0 | 16.4 | 10.75 | 10.7 | 2.7 | 12.0 | 16.0 | Q1 |
| UC3872MTR | SSOP | DBQ | 16 | 2500 | 330.0 | 12.4 | 6.4 | 5.2 | 2.1 | 8.0 | 12.0 | Q1 |

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

| Device | Package Type | Package Drawing | Pins | SPQ | Length (mm) | Width (mm) | Height (mm) |
|------------|--------------|-----------------|------|------|-------------|------------|-------------|
| UC2872DWTR | SOIC | DW | 16 | 2000 | 367.0 | 367.0 | 38.0 |
| UC3872DWTR | SOIC | DW | 16 | 2000 | 356.0 | 356.0 | 35.0 |
| UC3872MTR | SSOP | DBQ | 16 | 2500 | 356.0 | 356.0 | 35.0 |

TUBE



*All dimensions are nominal

| Device | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| UC2872DW | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UC2872DW.A | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UC3872DW | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UC3872DW.A | DW | SOIC | 16 | 40 | 507 | 12.83 | 5080 | 6.6 |
| UC3872M | DBQ | SSOP | 16 | 75 | 506.6 | 8 | 3940 | 4.32 |
| UC3872M.A | DBQ | SSOP | 16 | 75 | 506.6 | 8 | 3940 | 4.32 |
| UC3872MG4 | DBQ | SSOP | 16 | 75 | 506.6 | 8 | 3940 | 4.32 |

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2025, Texas Instruments Incorporated