
SQBW204R7J <

CGS | CGS SQ TE Internal #: 1-1623779-5 4.7 ohm, Through-Hole Power Resistor, Wire Wound, 20 W, 5 %, ±300 ppm/°C, Radial-Leaded, Copper Termination, 60 x 14 x 13.5 mm, CGS SQ

View on TE.com >



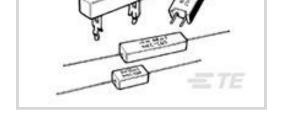

Resistance Value: 4.7 ΩResistor Type: Power ResistorElement Type: Wire WoundPower Rating: 20 WResistance Class: Up to 1kΩ

All Wirewound Resistor: Vertical Mount (202)

Features

Product Type Features

Resistor Type

Element Type

Power Resistor

Wire Wound



Configuration Features

Number of Resistors	1
Electrical Characteristics	
Resistance Value	4.7 Ω
Power Rating	20 W
Resistance Class	Up to 1kΩ
Passive Component Tolerance	5 %
Body Features	
Lead Type	Radial-Leaded
Termination Features	
Termination Area Base Material	Copper
Number of Terminations	2
Dimensions	
Passive Component Dimensions	60 x 14 x 13.5 mm

SQBW204R7J

4.7 ohm, Through-Hole Power Resistor, Wire Wound, 20 W, 5 %, ±300 ppm/°C, Radial-Leaded, Copper Termination, 60 x 14 x 13.5 mm, CGS SQ



Usage Conditions

Operating Temperature Range

Temperature Coefficient

Packaging Features

Packaging Method

-55 – 250 °C

±300 ppm/°C

Loose Piece - Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


SQBW204R7J

4.7 ohm, Through-Hole Power Resistor, Wire Wound, 20 W, 5 %, ±300 ppm/°C, Radial-Leaded, Copper Termination, 60 x 14 x 13.5 mm, CGS SQ






Also in the Series | CGS SQ

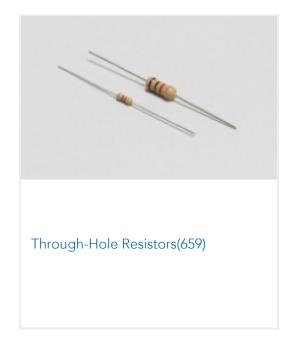

Customers Also Bought

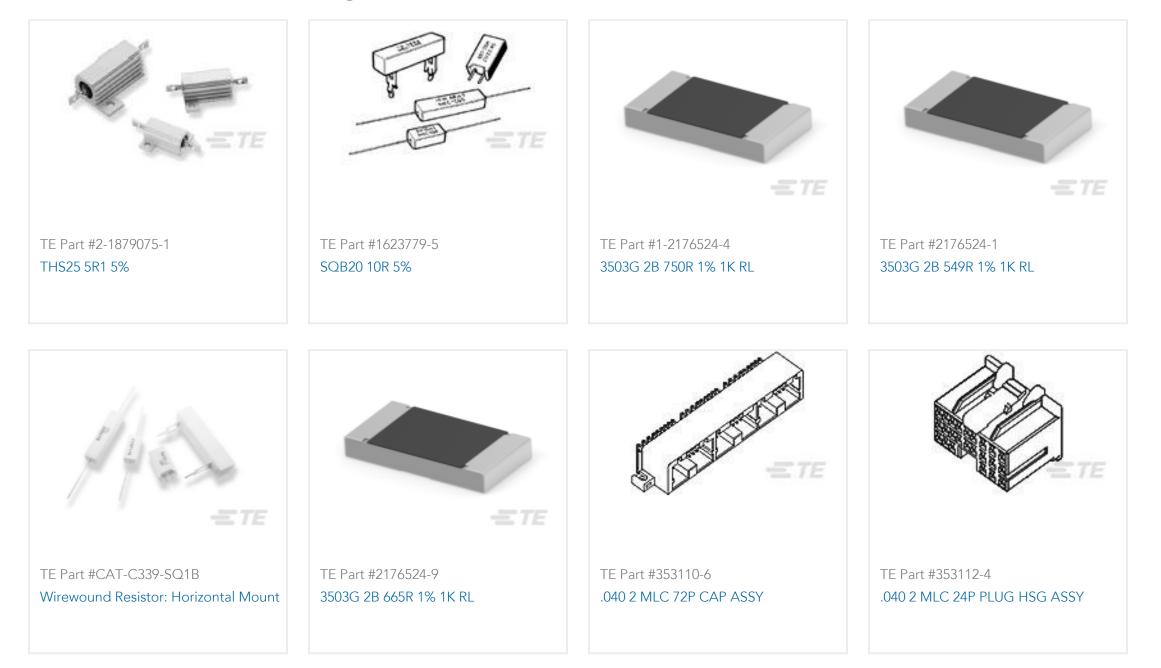

Documents

Product Drawings SQB20 4R7 5% (WIRE)

English

Datasheets & Catalog Pages 4-1773460-6_RESISTIVE_SOLUTIONS_RAIL

English

SQBW204R7J

4.7 ohm, Through-Hole Power Resistor, Wire Wound, 20 W, 5 %, ±300 ppm/°C, Radial-Leaded, Copper Termination, 60 x 14 x 13.5 mm, CGS SQ



1309350_PASSIVE_COMPONENT

English

8-1773459-4_POWER_FILTERING_AND_RESISTIVE_SOLUTIONS_FOR_ELEVATORS_AND_ESCALATORS

English