

DSCA30/31



Analog Voltage-input Signal Conditioners, Narrow Bandwidth

DESCRIPTION

Each DSCA30/31 voltage-input module provides a single channel of analog input which is filtered, isolated, amplified, and converted to a high-level voltage output (Figure below). Signal filtering is accomplished with a five-pole filter which provides 85dB of normal-mode rejection at 60Hz and 80dB at 50Hz. An anti-aliasing pole is located on the field side of the isolation barrier, and the other four poles are on the system side. After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges.

Module output is either voltage or current. For current-output models a dedicated loop supply is provided at Terminal 3 (+OUT) with loop return located at Terminal 4 (-OUT). The system-side load may be either floating or grounded.

Special input circuits provide protection against accidental connection of power-line voltages up to 240VAC and against transient events as defined by ANSI/IEEE C37.90.1. Protection circuits are also present on the signal output and power input terminals to guard against transient events and power reversal. Signal and power lines are secured to the module using screw terminals which are in pluggable terminal blocks for ease of system assembly and reconfiguration.

The modules have excellent stability over time and do not require recalibration; however, zero and span settings are adjustable up to ±5% to accommodate situations where fine-tuning is desired. The adjustments are made using potentiometers located under the front panel label and are non-interactive for ease of use.

FEATURES


- Accepts Millivolt and Voltage Level Signals
- Industry-standard Output of 0 to +10V, ±10V, 0-20mA, or 4-20mA
- 1500Vrms Transformer Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- Input Protected to 240VAC Continuous
- True 3-way Isolation
- Wide Supply Voltage Range
- 160dB CMR
- 85dB NMR at 60Hz, 80dB NMR at 50Hz
- ±0.03% Accuracy
- ±0.01% Linearity
- Easily Mounts on Standard DIN-rail
- UL/cUL Listed
- CE and ATEX Compliant
- Manufactured per RoHS III Directive 2015/863

BENEFITS

- Protects User Equipment from Lightning and Heavy Equipment Power-line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair
- Reduces EMC Concerns
- Signal Filtering in Noisy Environments
- Simplifies Sensor Interface and Signal Conditioning Design
- Provides Isolation of External Sensors
- Breaks Ground Loops

APPLICATIONS

- Analog Signal Filtering
- Industrial Process Control
- Test and Measurement
- System and Signal Monitoring
- Temperature Measurement
- Torque Measurement
- Civil Engineering
- Geotechnical Monitoring

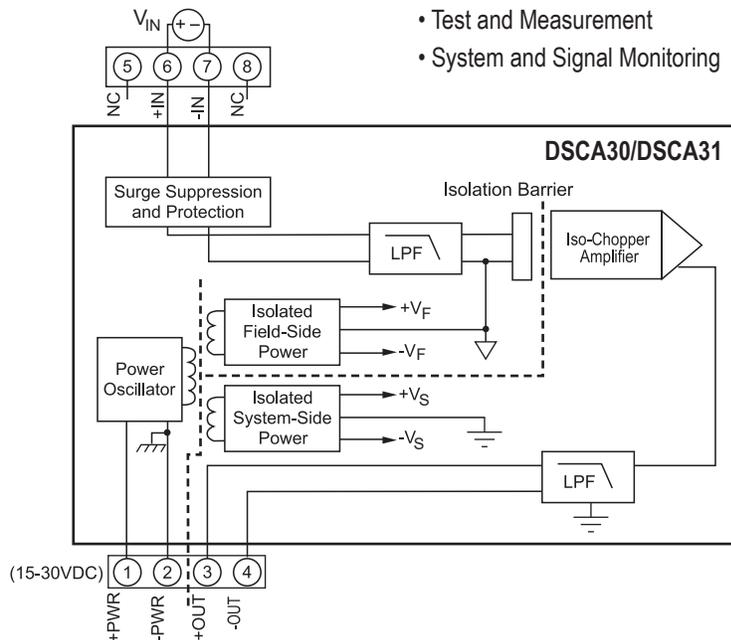

DSCA30/DSCA31 Block Diagram - [For Module Dimensions and Pinouts, See Page 4-35](#)

Specifications Typical* at T_A = +25°C and +24VDC Supply Voltage

Module	DSCA30	DSCA31
Input Range	±10mV to ±100mV	±1V to ±40V
Input Bias Current	±0.5nA	±0.05nA
Input Resistance		
Normal	50MΩ	500kΩ (min)
Power Off	65kΩ	500kΩ (min)
Overload	65kΩ	500kΩ (min)
Input Protection		
Continuous	240Vrms (max)	240Vrms (max)
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
Output Range	See Ordering Information	See Ordering Information
Load Resistance (I _{OUT})	600Ω (max)	600Ω (max)
Current Limit	8mA (V _{OUT}), 30mA (I _{OUT})	8mA (V _{OUT}), 30mA (I _{OUT})
Output Protection		
Short to Ground	Continuous	Continuous
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMV, Input to Output, Input to Power		
Continuous	1500Vrms (max)	1500Vrms (max)
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
CMV, Output to Power		
Continuous	50VDC (max)	50VDC (max)
CMR (50Hz or 60Hz)	160dB	160dB
Accuracy ⁽¹⁾	±0.03% Span	±0.03% Span
Linearity	±0.01% Span	±0.01% Span
Adjustability	±5% Zero and Span	±5% Zero and Span
Stability		
Input Offset	±0.5μV/°C	±5μV/°C
Output Offset	±6ppm/°C (V _{OUT}), ±20ppm/°C (I _{OUT})	±6ppm/°C (V _{OUT}), ±20ppm/°C (I _{OUT})
Zero Suppression	±50ppm(V _z) ⁽²⁾ /°C	±50ppm(V _z) ⁽²⁾ /°C
Gain	±35ppm/°C	±55ppm/°C
Output Noise, 100kHz BW	250μVrms (V _{OUT}), 1μArms (I _{OUT})	250μVrms (V _{OUT}), 1μArms (I _{OUT})
Bandwidth, -3dB	3Hz	3Hz
NMR	85dB at 60Hz, 80dB at 50Hz	85dB at 60Hz, 80dB at 50Hz
Response Time, 90% Span	165ms	165ms
Power Supply		
Voltage	15 to 30VDC	15 to 30VDC
Current	25mA (V _{OUT}), 55mA (I _{OUT})	25mA (V _{OUT}), 55mA (I _{OUT})
Sensitivity	±0.0001%/%	±0.0001%/%
Protection		
Reverse Polarity	Continuous	Continuous
Transient	ANSI/IEEE C37.90.1	ANSI/IEEE C37.90.1
Mechanical Dimensions (h)x(w)x(d)	2.95" x 0.89" x 4.13" (75mm x 22.5mm x 105mm)	2.95" x 0.89" x 4.13" (75mm x 22.5mm x 105mm)
Mounting	DIN EN 50022 -35x7.5 or -35x15 rail	DIN EN 50022 -35x7.5 or -35x15 rail
Environmental		
Operating Temp. Range	-40°C to +80°C	-40°C to +80°C
Storage Temp. Range	-40°C to +80°C	-40°C to +80°C
Relative Humidity	0 to 95% Noncondensing	0 to 95% Noncondensing
Emissions EN61000-6-4	ISM, Group 1	ISM, Group 1
Radiated, Conducted	Class A	Class A
Immunity EN61000-6-2	ISM, Group 1	ISM, Group 1
RF	Performance A ±0.5% Span Error	Performance A ±0.5% Span Error
ESD,EFT	Performance B	Performance B

NOTES:

*Contact factory or your local Dataforth sales office for maximum values.

(1) Includes linearity, hysteresis, and repeatability.

 (2) V_z is the nominal input voltage that results in 0V or 0mA output.

Ordering Information

Model	Input Range	Output Range†
DSCA30-01	-10mV to +10mV	1
DSCA30-02	-50mV to +50mV	1
DSCA30-03	-100mV to +100mV	1
DSCA30-04	-10mV to +10mV	2, 3, 4
DSCA30-05	-50mV to +50mV	2, 3, 4
DSCA30-06	-100mV to +100mV	2, 3, 4
DSCA30-07	0 to +10mV	2, 3, 4
DSCA30-08	0 to +50mV	2, 3, 4
DSCA30-09	0 to +100mV	2, 3, 4
DSCA31-01	-1V to +1V	1
DSCA31-02	-5V to +5V	1
DSCA31-03	-10V to +10V	1
DSCA31-04	-1V to +1V	2, 3, 4
DSCA31-05	-5V to +5V	2, 3, 4
DSCA31-06	-10V to +10V	2, 3, 4
DSCA31-07	-20V to +20V	1
DSCA31-08	-20V to +20V	2, 3, 4
DSCA31-09	-40V to +40V	1
DSCA31-10	-40V to +40V	2, 3, 4
DSCA31-11	0 to +1V	2, 3, 4
DSCA31-12	0 to +5V	2, 3, 4
DSCA31-13	0 to +10V	2, 3, 4
DSCA31-14	0 to +20V	2, 3, 4
DSCA31-15	0 to +40V	2, 3, 4

†Output Ranges Available

Output Range	Part No. Suffix	Example
1. -10V to +10V	NONE	DSCA30-01
2. 0V to +10V	NONE	DSCA30-04
3. 4-20mA	C	DSCA30-04C
4. 0-20mA	E	DSCA30-04E
5. 0 to +5V	A	N/A
6. 0 to 1mA	B	N/A

Installation Notes:

- 1.) This Equipment is Suitable for Use in Class I, Division 2, Groups A, B, C, D, or Non-hazardous Locations Only.
- 2.) WARNING - Explosion Hazard - Substitution of Components May Impair Suitability for Class I, Division 2.
- 3.) WARNING - Explosion Hazard - Do Not Disconnect Equipment Unless Power Has Been Switched Off or the Area is Known to be Non-hazardous.
- 4.) The Power to These Devices Shall Be Limited by an Over-current Protection Device, UL Certified Fuse (JDYX/JDYX2) Rated 6A Max.