
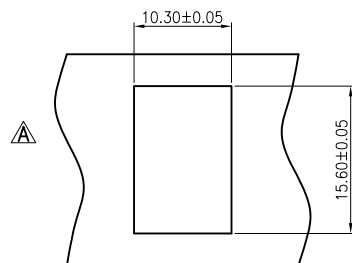
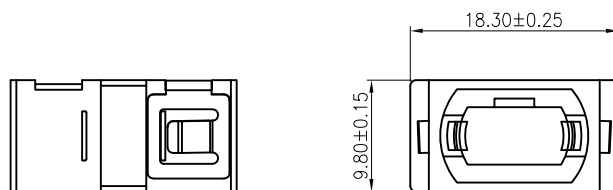



APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/14/20	
A		ADDED DIM.	1/6/23	LH/NL

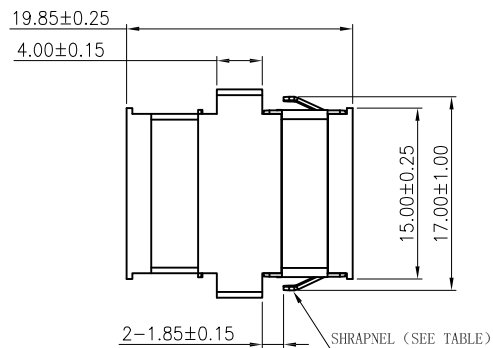

RECOMMENDED PANEL CUT-OUT

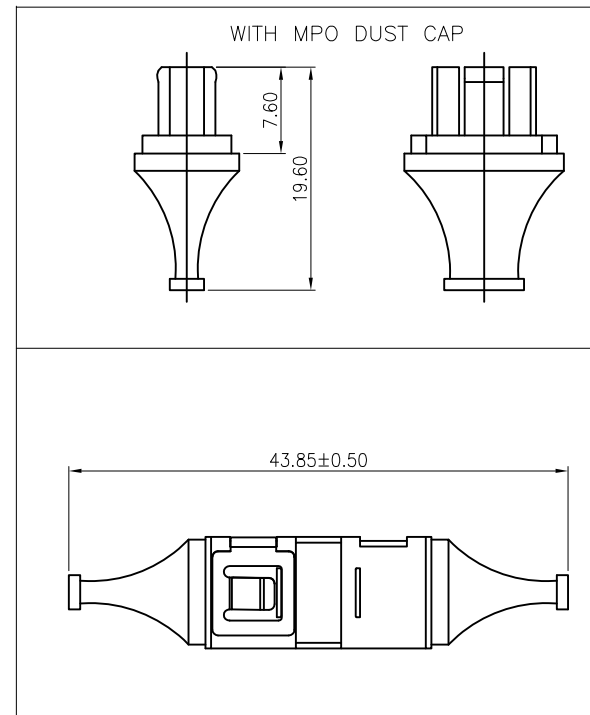

OPMF1BNNC1NC	PEI Red	NO
OPMF1BNNC1PC	PEI Red	With
OPMD1BNNC1NC	PEI Water blue	NO
OPMD1BNNC1PC	PEI Water blue	With
OPMB1BNNC1NC	PEI Blue	NO
OPMB1BNNC1PC	PEI Blue	With
OPMA1BNNC1NC	PEI Green	NO
OPMA1BNNC1PC	PEI Green	With
OPMG1BNNC1NC	PEI Black	NO
OPMG1BNNC1PC	PEI Black	With
P/N:	COLOUR	SHRAPNEL

SPECIFICATIONS:

Material:
Housing: PEI, rated UL 94V-0, Color: See Chart
Electrical:

Standards of IEC,EIA/TIA, Telcordia
Repeatability: 500 min
Insertion loss: 0.2dB max
Temperature Rating:
Operating temperature: -40°C to +75°C
Environmental:
Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS
ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ±.10	Ø.X ±.10
.XX ±.020	Ø.XX ±.015
.XXX ±.015	Ø.XXX ±.010

DRAWN	OW	9/14/20
CHECKED	JL	9/14/20
APPROVED		

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY
AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN
PERMISSION FROM ADAM TECH

ADAM
TECH

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE OPTICAL MPO ADAPTERS, 1 PORTS, SHORT-EARED, WITH MPO DUST CAP		
SIZE X	PART NO. OPMX1BNNC1XC	REV. A
REF: S00005C	SCALE: NTS	SHEET 1 OF 1