



Sensors > Force Sensors > Compact Compression Load Cell



Force Sensor Type: OEM Compression Load Cells

Force Direction: Compression

Full Scale Range: 25 lbf

Operating Temperature Range: 0 – 50 °C [ 32 – 122 °F ]

Supply Voltage Range: 3 VDC

[All Compact Compression Load Cell \(46\)](#)

Features

Product Type Features

Force Sensor Type	OEM Compression Load Cells
-------------------	----------------------------

Electrical Characteristics

Full Scale Range	25 lbf
Supply Voltage Range	3 VDC

Usage Conditions

Operating Temperature Range	0 – 50 °C[32 – 122 °F]
Accuracy	±1 % of FS

Operation/Application

Output Signal Type	14 Bit I2C
--------------------	------------

Other

Force Direction	Compression
Zero Shift in CTR	±.05 %FS/°C
Sensitivity Shift	±.05 %FS/°C

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)



EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | MEAS FX29

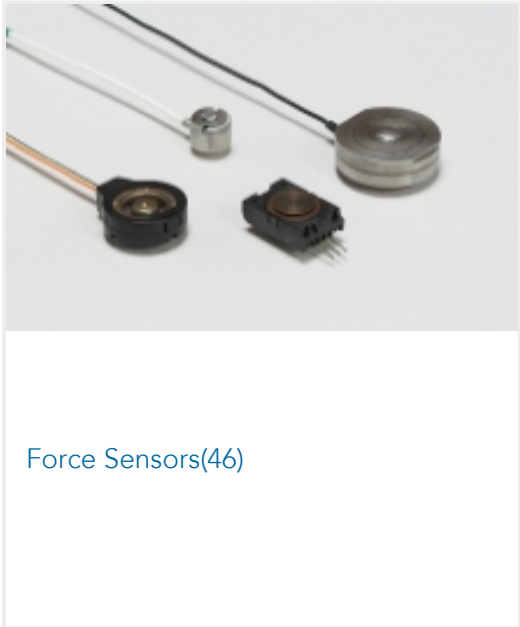

Customers Also Bought





TE Part #GA10K3MCD1  
MCD PROBE, 10K OHMS,+/- 0.2C @ 25C




TE Part #T4110001051-000  
M12,FEMALE,STRAIGHT,A CODE,5P, PG7,GOLD




TE Part #20009605-16  
FX29K0-040B-0010-L



TE Part #T4171310504-001  
M12,FRONT MOUNTING,FEMALE,D, 4P,0.2M WIRE



TE Part #CAT-P592-R472A  
PIDG Ring Tongue Terminals



TE Part #1-1393030-4  
SSRD-240D25 = PANEL MOUNT,25A, 240VAC



TE Part #2-1393210-5  
T9AS1L12-24



TE Part #3-1625885-1  
1W SM M/OX 5% 1K0



TE Part #3-2176331-3  
CRGP 2512 4K7 1%

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_20009605-17\_D.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_20009605-17\_D.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_20009605-17\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

FX29 COMPRESSION LOAD CELL

English