


DIMENSIONS

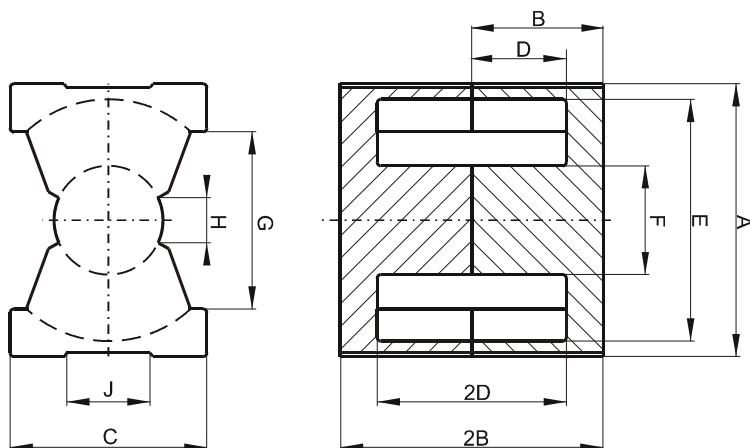

(mm)	Nominal:	Tol. min.:	Tol. max.:
A	33.0	-0.5	+ 0.5
B	15.15	-0.13	+ 0.13
2B	30.3	-0.25	+ 0.25
C	22.0	-0.5	+ 0.5
D	10.65	-0.15	+ 0.15
2D	21.3	-0.3	+ 0.3
E	27.5	-0.5	+ 0.5
F	13.5	-0.25	+ 0.25
G	19.0 Min.		
H	5.5 Min.		
J	11.6 Min.		
Eff. Parameters			
Ae mm²	Amin mm²	le mm	Ve mm³
167.0	142.0	74.7	12500

INDUCTANCE

AL value (nH/T ²)	Test conditions
Nom: 100 ± 3%	10 kHz, < 0.5 mT, 25 °C

MARKING



REMARKS

Al. measured in combination with gapped core half; G ≈ 3200 μm on gapped core set

CORE LOSSES

P _i max	Test conditions
< 1.6 W/set (< 128 mW/cm ³)	100 kHz, 100 mT, 100 °C

NOTE

Spec. modifications	Previous	Revised
2019-09-10		Issued