



Sensors > Force Sensors > Compact Compression Load Cell



Force Sensor Type: OEM Compression Load Cells

Force Direction: Compression

Full Scale Range: 100 lbf

Operating Temperature Range: 0 – 50 °C [32 – 122 °F]

Supply Voltage Range: 3 VDC

[All Compact Compression Load Cell \(46\)](#)

Features

Product Type Features

Force Sensor Type	OEM Compression Load Cells
-------------------	----------------------------

Electrical Characteristics

Full Scale Range	100 lbf
Supply Voltage Range	3 VDC

Usage Conditions

Operating Temperature Range	0 – 50 °C[32 – 122 °F]
Accuracy	±1 % of FS

Operation/Application

Output Signal Type	14 Bit I2C
--------------------	------------

Other

Force Direction	Compression
Zero Shift in CTR	±.05 %FS/°C
Sensitivity Shift	±.05 %FS/°C

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)



EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2025 (247) Candidate List Declared Against: JAN 2025 (247) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | MEAS FX29

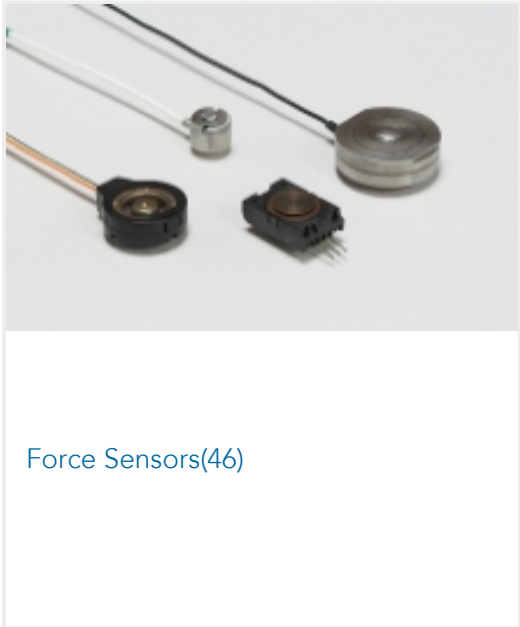

Customers Also Bought





TE Part #K1160973
Power Relay 29-251-11-907



TE Part #T3609200122-000
DLX-20-MB



TE Part #NB-PTCO-170
Pt1000, 2.0x5.0, Class A, PTFD102A1A0



TE Part #20009605-52
FX292X-040A-0200-L



TE Part #66570-8
20 DF PIN CONT, SMALL PACK



TE Part #3-640429-8
08P MTA156 CONN ASSY 24AWG WHT



TE Part #5-747905-2
9 Rcpt Solder Cup, Gold Flash, WHT



TE Part #925552-1
AM WIRE PIN 20-17 .013 BR



TE Part #5-1478763-2
Metal backshell 15 way 45 Deg Entry-KIT

TE Part #1-1414719-0
RESOLVER V23401-D1401-E801

Documents

3D PDF

3D

Customer View Model

ENG_CVM_CVM_20009605-23_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_20009605-23_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_20009605-23_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

FX29 COMPRESSION LOAD CELL

English