

PSR-M-EM3-HTL1-SC - Extension module



1105009

<https://www.phoenixcontact.com/us/products/1105009>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safe extension module for monitoring zero-speed, speed, direction of rotation, monitoring of 2 axes, NPN/PNP proximity switch, 1 x HTL encoder, TBUS interface, up to SIL 3, Cat. 4/PL e, pluggable screw terminal block, TBUS connector included

Product description

The configurable and individually scalable PSRmodular safety system is a flexible safety solution for monitoring your machine or system. The safe extension module is used to monitor downtimes, speed, and direction of rotation. The module is suitable for connection of NPN/PNP proximity switches and HTL encoders.

Your advantages

- Cost-effective safety solution with a high level of adaptability to individual requirements
- Fast startup, thanks to easy hardware and software configuration
- Machine downtimes minimized with comprehensive, easy-to-understand diagnostics
- Low housing width of just 22.6 mm
- Up to Cat. 4/PL e in accordance with EN ISO 13849-1, SIL 3 in accordance with EN IEC 62061, SIL 3 in accordance with IEC 61508
- Suitable for elevator applications in accordance with EN 81-20

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 1105009 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN02 |
| Product key | DNA363 |
| GTIN | 4055626974927 |
| Weight per piece (including packing) | 191.5 g |
| Weight per piece (excluding packing) | 191.5 g |
| Customs tariff number | 85371098 |
| Country of origin | IT |

Technical data

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Product properties

| | |
|--------------|--------------------------------------|
| Product type | Safety device |
| Application | Over-speed safety relay |
| | Zero-speed safety relay |
| | Monitoring the direction of rotation |
| Control | 1 and 2 channel |

Insulation characteristics

| | |
|------------------|-----|
| Protection class | III |
|------------------|-----|

Insulation characteristics

| | |
|----------------------|-----|
| Overvoltage category | III |
| Degree of pollution | 2 |

Times

| | |
|---------------|-----------------------|
| Response time | see user manual |
| Restart time | min. 5 s (Boot time) |
| | max. 10 s (Boot time) |

Electrical properties

| | |
|---|--|
| Maximum power dissipation for nominal condition | 3.22 W ($U_B = 28.8 \text{ V}$, $IN1 = IN2 = 50 \text{ mA}$, $U_{ENC} = 30 \text{ V}$) |
| Nominal operating mode | 100% operating factor |
| Interfaces | DIN rail TBUS for connection to the master module, supplied as standard |
| | Encoder |
| | Proximity switches |
| Rated surge voltage/insulation | Basic insulation 4 kV between 24 V power supply and I/Os to the housing |

Supply

| | |
|--|--|
| Designation | A1/A2 |
| Rated control circuit supply voltage U_S | 19.2 V DC ... 28.8 V DC |
| Rated control circuit supply voltage U_S | 24 V DC -20 % / +20 % (provide external protection, typically 1 A) |
| Rated control supply current I_S | typ. 40 mA |
| Power consumption at U_S | typ. 0.96 W |
| Inrush current | 3.5 A ($\Delta t = 1 \text{ ms}$ at U_S) |
| Filter time | typ. 20 ms (at A1 in the event of voltage dips at U_S) |
| Protective circuit | Serial protection against polarity reversal |
| | Suppressor diode |

Input data

Measurement

| | |
|---|---|
| Input name | Proximity switch inputs |
| | IN1, IN2 |
| Description of the input | NPN / PNP (3- or 4-wire) |
| Number of inputs | 2 |
| Input voltage range "0" signal | 0 V DC ... 5 V DC (NPN) |
| | 16 V DC ... 28.8 V DC (PNP) |
| Input voltage range "1" signal | 16 V DC ... 28.8 V DC (NPN) |
| | 0 V DC ... 5 V DC (PNP) |
| Input current range "0" signal | < 2 mA (NPN) |
| Precision | 5 % (in reference to the parameterized limit value) |
| Limit frequency | max. 5 kHz |
| Duty factor | 55 % ... 95 % |
| Pulse width | min. 20 µs |
| Max. permissible overall conductor resistance | 150 Ω |
| Protective circuit | Suppressor diode |
| Current consumption | typ. 13 mA (NPN, at U_S) |
| | typ. -13 mA (PNP, at U_S) |
| | max. 17 mA (NPN, at 28.8 V DC) |
| | max. -15 mA (PNP, at 28.8 V DC) |

Measurement

| | |
|---|--|
| Input name | Encoder input |
| Description of the input | HTL |
| | IEC 61131-2 Type 2 |
| Number of inputs | 1 |
| Precision | 5 % (in reference to the parameterized limit value) |
| Limit frequency | max. 300 kHz |
| Max. permissible overall conductor resistance | 150 Ω |
| HTL Signal form/signal level | 11 V ... 30 V (Duty factor trace A, B: 50% ±15%, phase shift trace A, B: 90° ±40°) |
| Current consumption | typ. 12 mA (Per track for U_S) |

Output data

Digital: Proximity switch supply (24V/0V)

| | |
|------------------------------|--|
| Short-circuit protection | no |
| Nominal output voltage range | 16.7 V DC ... 26.3 V DC (U_S - 2,5 V) |

Connection data

Connection technology

| | |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

PSR-M-EM3-HTL1-SC - Extension module



1105009

<https://www.phoenixcontact.com/us/products/1105009>

Conductor connection

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Conductor cross section rigid | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section AWG | 24 ... 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |
| Tightening torque | 0.5 Nm ... 0.6 Nm |

Signaling

| | |
|---------------------------|---|
| Status display | 5 x LED (yellow), 1 x LED (green), 2 x LED (orange) |
| Operating voltage display | 1 x LED (green) |
| Error indication | 2 x LED (red) |

Dimensions

| | |
|--------|-----------|
| Width | 22.61 mm |
| Height | 112.58 mm |
| Depth | 113.6 mm |

Material specifications

| | |
|------------------|-----------------------------|
| Color (Housing) | yellow (RAL 1018) |
| Housing material | Polyamide PA non-reinforced |

Characteristics

Safety data: EN ISO 13849

| | |
|------------------------|---|
| Category | 3 |
| Performance level (PL) | e |

Safety data: IEC 61508 - High demand

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

Safety data: EN IEC 62061

| | |
|------------------------------|---|
| Safety Integrity Level (SIL) | 3 |
|------------------------------|---|

Environmental and real-life conditions

Ambient conditions

| | |
|--|-------------------------------------|
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Ambient temperature (operation) | -10 °C ... 55 °C (observe derating) |
| Ambient temperature (storage/transport) | -20 °C ... 85 °C |
| Maximum altitude | ≤ 2000 m (Above sea level) |
| Max. permissible humidity (storage/transport) | 95 % (non-condensing) |
| Max. permissible relative humidity (operation) | 95 % (non-condensing) |

PSR-M-EM3-HTL1-SC - Extension module



1105009

<https://www.phoenixcontact.com/us/products/1105009>

| | |
|-----------------------|--|
| Shock | 10g for $\Delta t = 16$ ms (continuous shock, 1000 shocks in each space direction) |
| Vibration (operation) | 10 Hz ... 150 Hz, 2g |

Approvals

CE

| | |
|----------------|--------------|
| Identification | CE-compliant |
|----------------|--------------|

Mounting

| | |
|-------------------|------------------------|
| Mounting type | DIN rail mounting |
| Assembly note | Observe derating |
| Mounting position | vertical or horizontal |


PSR-M-EM3-HTL1-SC - Extension module

1105009


https://www.phoenixcontact.com/us/products/1105009



Drawings

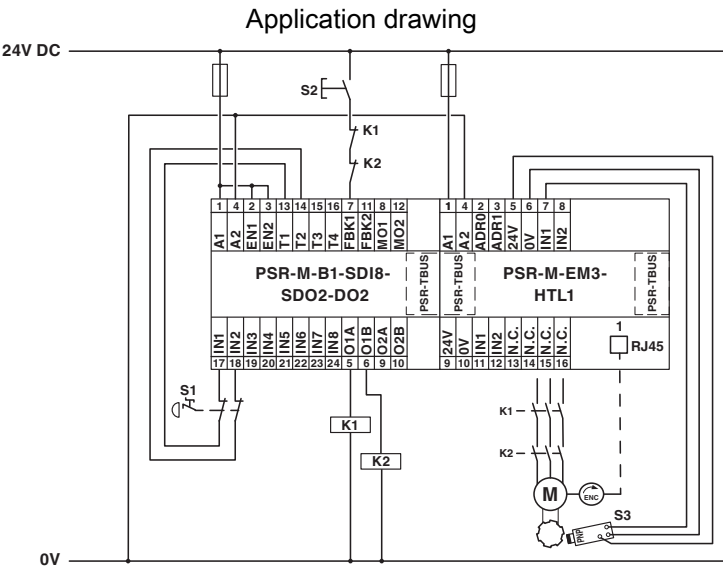

Example application

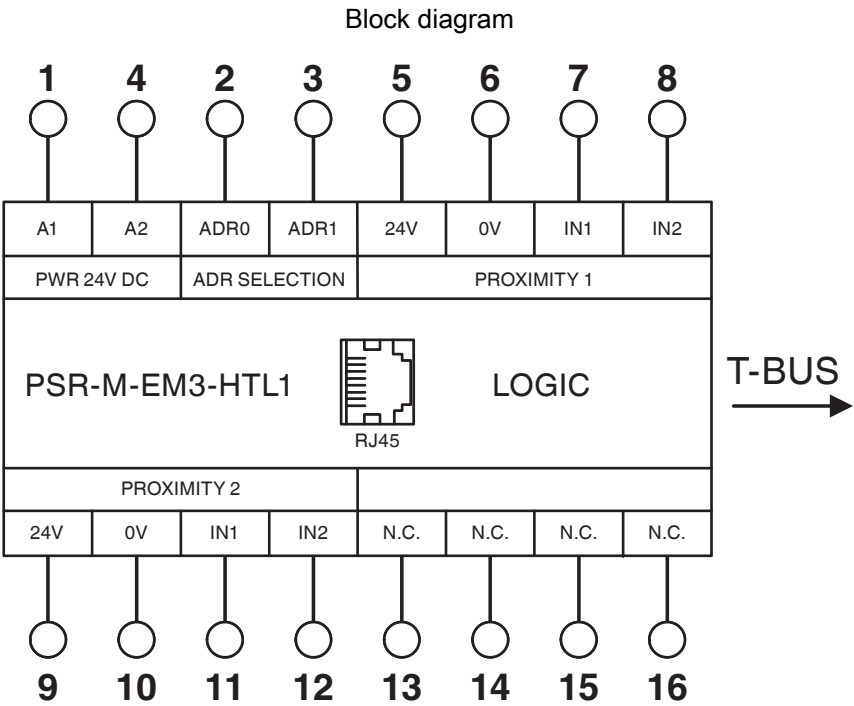

Block diagram


PSR-M-EM3-HTL1-SC - Extension module



1105009

<https://www.phoenixcontact.com/us/products/1105009>

Approvals

 To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1105009>



Functional Safety

Approval ID: Z10 029429 0013



cULus Listed

Approval ID: E238705

PSR-M-EM3-HTL1-SC - Extension module



1105009

<https://www.phoenixcontact.com/us/products/1105009>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27371819 |
|-------------|----------|

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

PSR-M-EM3-HTL1-SC - Extension module



1105009
<https://www.phoenixcontact.com/us/products/1105009>

Environmental product compliance

| | |
|---|--|
| EU RoHS | |
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
| China RoHS | |
| Environment friendly use period (EFUP) | EFUP-E |
| | No hazardous substances above the limits |
| EU REACH SVHC | |
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |

Phoenix Contact 2025 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com