


** Not all features are shown in this drawing. For more detailed information, please contact your Fair-Rite representative.

UNCONTROLLED ~CATALOG~ DRAWING

SIZE	PART NO.	REV.
B	9677282508	~

AFTER COATING

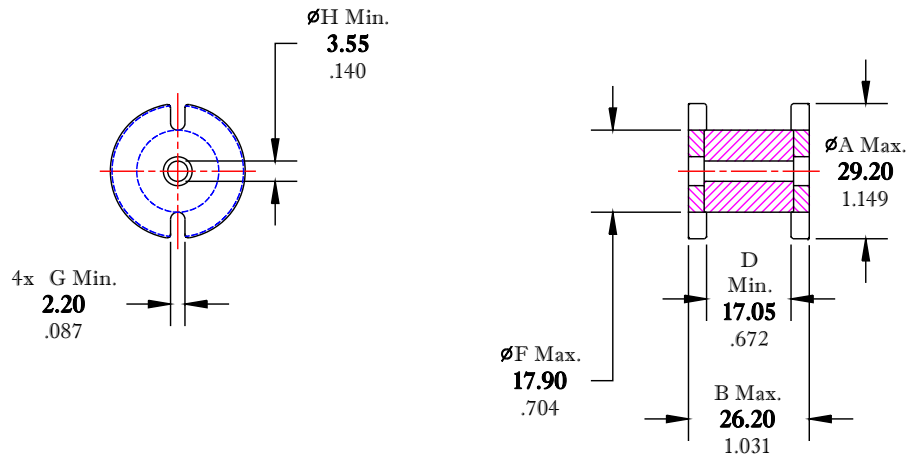

DIMENSIONS
BOLD NUMBERS ARE IN MILLIMETERS
 LIGHT NUMBERS ARE IN INCHES

ELECTRICAL SPECIFICATIONS	
AL (nH) $\pm 10\%$	AL (nH) Min.
95	81 @ NI=520
AL VALUE MEASURED @ 1 kHz, 1 Volt WITH N=55 #18 AWG @ 23°C	

SEE SOP# ELC-33

$B_{Max.} - B_{Min.}$
 ≤ 0.40
 $\leq .016$

NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 9677282509.
- 2 - COATED BOBBIN TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 500 Vrms.
- 3 - COATING THICKNESS = **0.25mm** [.010"] MAX.

FR# 77

FAIR-RITE PRODUCTS CORP.					
TITLE		COATED BOBBIN			
DRAWN BY D. FOOTE	DATE 7/2/2019	SIZE	PART NO.	REV.	
CHKD BY		B	9677282508	~	
APPRVD BY		SCALE	NONE	SHEET	1 of 1