

# HKP

## 1/4" x 1 1/4" Panel-mount fuse holders



### Product features

- For 1/4" x 1 1/4" (6.3 mm x 32 mm) fuses
- Maximum panel thickness 5/16" (7.9 mm) thick
- Bayonet-type knob
- Vibration resistant
- Standard plastic nut
- Optional metal nut
- Knob 9435-S
- Silicon washer

### Agency information

- cURus Recognized: file E14853, Guide: IZLT2, IZLT8
- CE

### Environmental information

- RoHS compliant
- Weee compliant



### General specifications

- Temperature rating (RTI): The mounting body for all devices has a temperature rating of +150 °C. The knob for these devices are molded plastic with a temperature rating of +150 °C.
- Meets UL 94HB
- Terminal Strength: 5 pounds
- Torque: Mounting: 15 inch-pound maximum
- Salt Spray (corrosion): MIL-STD-202G, Method 101E, Test condition B

### Ordering information


- Specify packaging prefix and product code
- Optional metal nut, order separately part number 1A4806-2 (100 parts minimum)

	Specifications		
Product code	Feature	Voltage rating	Current rating
HKP-R	Standard	250 V	30 A
HKP-BBHH-R	¼" Quick-Connects, nut and washer assembled	250 V	30 A
HKP-HH-R	¼" Quick-Connects	250 V	30 A
HKP-L-R	2250 V stand-off barrier	250 V	30 A
HKP-LW-HH-R	Drip-proof knob, 2250 V stand-off barrier and ¼" quick connects <sup>1</sup>	250 V	30 A
HKP-OO-R	Snap-lock	250 V	30 A
HKP-W-R	Drip-proof knob <sup>1</sup>	250 V	30 A
HKP-E-R	Standard with lock washer	250 V	30 A
HKP-CC-R	Extended panel mount	250 V	30 A


1. IP53 rating for exposed locations

Dimensions - mm [inches]  
Drawing Not to Scale


HKP-BBHH-R, HKP-HH-R, HKP-LW-HH-R

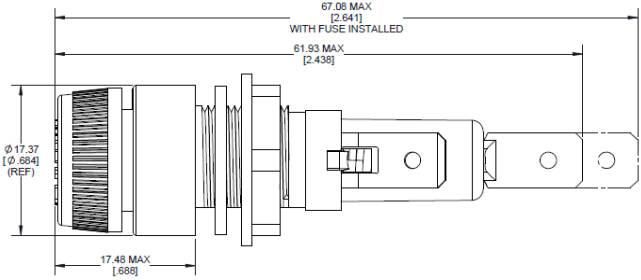


HKP-R, HKP-L-R, HKP-W-R, HKP-E-R

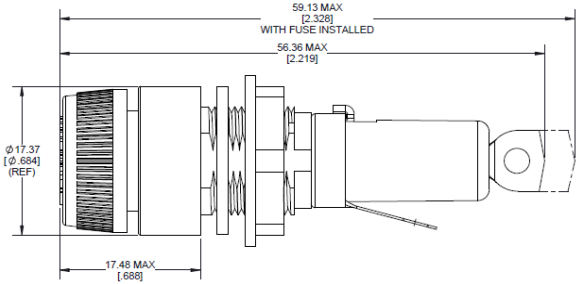


HKP-CC-R

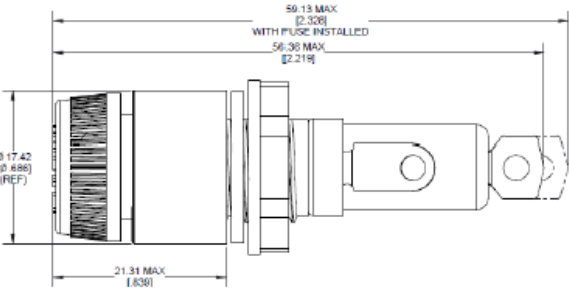


Mounting: HKP-R, HKP-BBHH-R, HKP-HH-R, HKP-L-R, HKP-LW-HH-R, HKP-W-R, HKP-E-R, HKP-CC-R

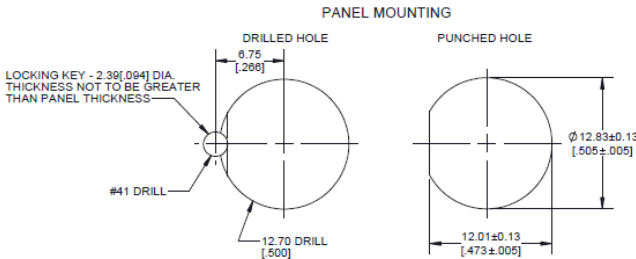

HKP-OO-R

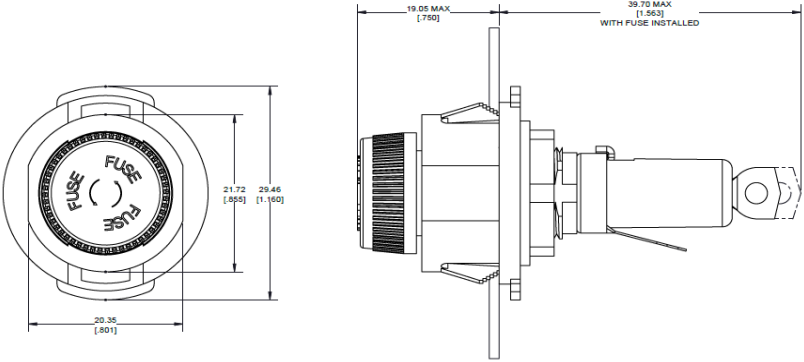

Mounting: HKP-OO-R



Packaging	
Packaging code prefix	Description
BK-	100 fuseholders with components bagged separately

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton  
Electronics Division  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com/electronics

© 2025 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2106 PCN24029  
January 2025

Eaton is a registered trademark.

All other trademarks are property  
of their respective owners.

Follow us on social media to get the  
latest product and support information.

