

6

5

4

3




2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	9/9/20	

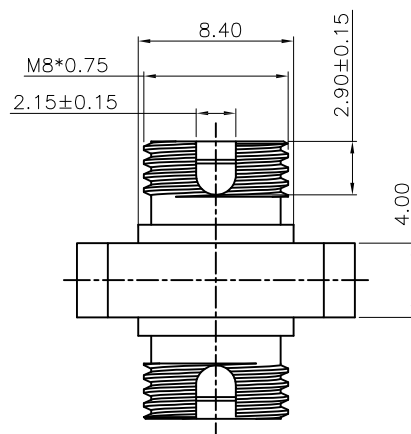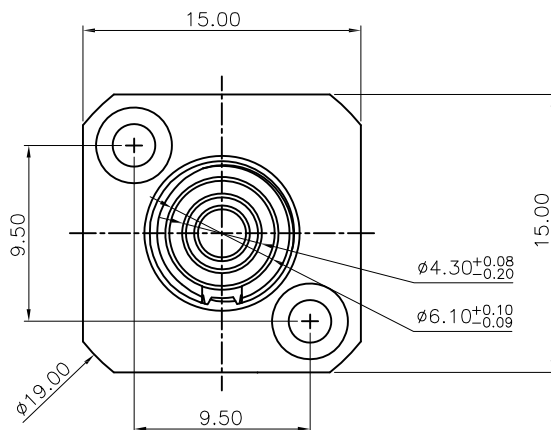

OPFN1ANNC1BNB	INSERTION LOSS: 0.1dB MAX	PVC Red
OPFN1ANNC1ANB	INSERTION LOSS: 0.2dB MAX	PVC Red
PART NUMBER	DESCRIPTION	Cap Color

SPECIFICATIONS:

Material:

Housing: ZA#5, rated UL 94V-0

Cap: PVC, rated UL 94V-0, Color: RED

Sleeve: Zircomia ceramic

Electrical:

Standards of IEC,EIA/TIA, Telcordia

Repeatability: (500 cycles min): 0.2dB max

Insertion loss: See Chart

Interchangeability: See Chart

Temperature Rating:

Operating temperature: -40°C to +75°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED
MM ANGLE
X. ± 0.35 X.* ± 2°
.X ± 0.30 .X* ± 1°
.XX ± 0.25 .XX* ± 0.5°
.XXX ± 0.15 .XXX* ± 0.5°

APPROVALS		DATE
DRAWN	LH	9/9/20
CHECKED	JL	9/9/20
APPROVED		

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE
OPTICAL FC ADAPTERS, 1 PORTS, WITH FC DUST CAP
SQUARE WITH POSITIONING HOLE

SIZE	PART NO.	REV.
X	OPFN1ANNC1XNB	-
REF: S00005C	SCALE: NTS	SHEET 1 OF 1