

6

5

4

3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev

AWO #

Description

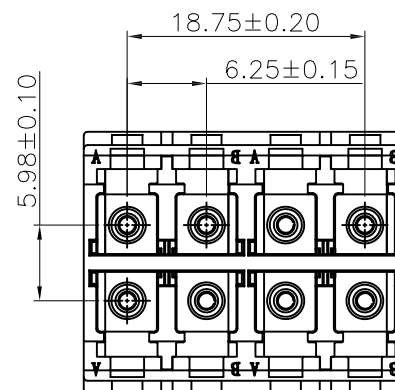
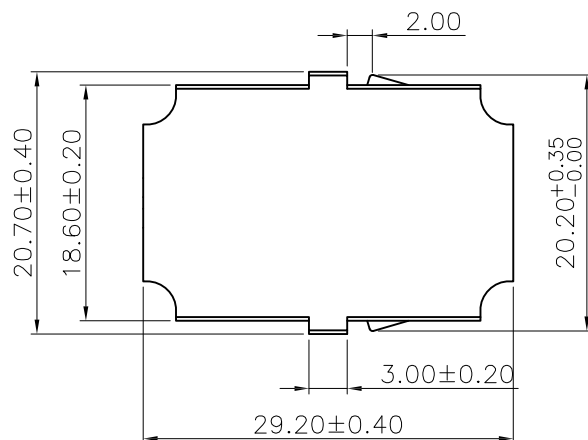
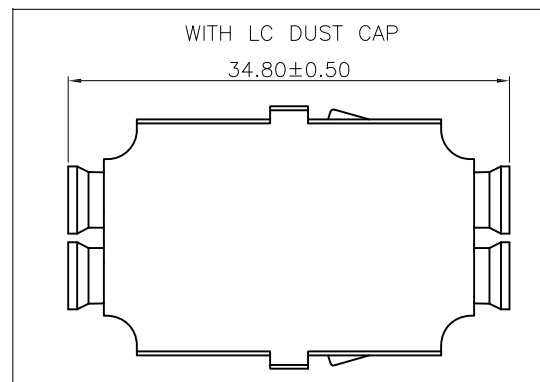
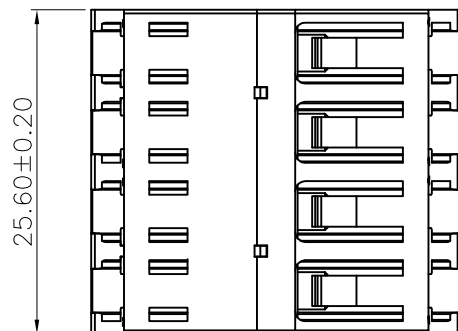
Date

Appr

-

RELEASED

9/9/20

**SPECIFICATIONS:**

Material:

Housing: PBT, rated UL 94V-0, Color: Blue

Cap: PP, rated UL 94V-0, Color: White

Electrical:

Standards of IEC 61754-20, YD/T 1272.1-2003

Repeatability: 500 min Cycles

Insertion loss: 0.2dB max

Interchangeability: 0.2dB

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MILLIMETERS
TOLERANCES: EXCEPT AS NOTED

MM	ANGLE
X. ± 0.35	X.* ± 2°
.X ± 0.30	.X* ± 1°
.XX ± 0.25	.XX* ± 0.5°
.XXX ± 0.15	.XXX* ± 0.5°

APPROVALS

DATE

DRAWN

LH

9/9/20

CHECKED

JL

9/9/20

APPROVED

ADAM
TECH
INTERCONNECTS

909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE

OPTICAL LC ADAPTERS, PC, DUAL ROW,
2*4 PORTS, SHORT EARS, WITH LC DUST CAP

SIZE
X

PART NO.

OPLB8SBNNC1NA

REV.
-

REF:

S00005C

SCALE: NTS

SHEET 1 OF 1