

## 3D50 5-INCH TOUCHSCREEN DISPLAY

Versatile CAN-based Display for Off-Highway Vehicles

- Intuitive touch technology to select objects and swipe through screens.
- Responsive PCAP touchscreen recognizes bare and gloved fingers, even when the display surface is wet.
- Easy application creation and integration with VUI Builder (J1939), Qt, or optional CODESYS (J1939, CANopen, and many more).
- Up to 2 Video inputs, up to 2 CAN bus inputs.
- Powerful processor with 3 second boot time (VUI Builder).
- Scratch resistant/anti-glare cover glass is optically bonded to LCD display for superior mechanical and visual performance.
- Bright, backlit display provides high contrast text and full color graphics for excellent sunlight readability.
- Convenient flush mounting provides modern look and feel, to seamlessly blend with vehicle cab design.
- Armrest, A-post, and dashboard mounting.
- Rugged design for extreme environments.
- Functions as an engine monitor or input device.





# VERSATILE DISPLAY. MANY FEATURES.

#### Flexible.

Series 3D50 is available with or without a projected capacitance touchscreen. This advanced touchscreen works even when wet or when the user is wearing gloves.

#### Bright.

This 5.0-inch backlit WVGA LCD (800×480) is very bright (700 nits) providing good daylight readability. It has software controlled LED backlighting and 16-bit color.

#### Powerful.

The powerful embedded computer can monitor and display many events and camera images simultaneously:

- 800MHz
- 512MB RAM
- 4GB storage
- USB 2.0

#### Useful.

Ideal for agriculture and construction vehicle applications, including virtual gauges, diagnostic menus, engine monitor, operator input, fault indicators and service reminders.

#### Easy to Program.

PC-based configuration tools makes application development fast and easy. Drag and drop graphics (supported by Qt and CODESYS), bitmaps, text with the click of a mouse.

#### Adaptable.

Designed for integration into off-highway vehicles. It functions in 12V/24V operation, boots in 3 seconds (VUI Builder) and is sealed against the ingress of liquids and dust.

#### Rugged.

The protective cover lens is scratch resistant glass, not plastic. Optical bonding of the cover glass improves impact resistance.


#### Adjustable.

There are many system interface options:

- Up to two CAN bus ports
- Up to two NTSC/PAL camera input ports
- Up to four digital inputs
- Up to four digital outputs
- One USB 2.0 port

### Readable.

Optically bonding the display, touch sensor and cover glass reduces reflections. An anti-glare coating further improves readability in bright sunlight.





# VERSATILE DISPLAY. ALL THE SPECIFICATIONS.

#### **Power Specifications**

Operating Voltage	8 VDC to 32 VDC
Power Consumption	5 Watts (typical) with full back light
Standby Current	<1 ma

#### **Environmental Specifications**

Operating temperature	ANSI/ASAE EP455 5.1.1	-30 °C to +65 °C
Storage Temperature	ANSI/ASAE EP455 5.1.2	-40 °C to +85 °C
Thermal Shock	ANSI/ASAE EP455 5.1.3	-40 °C to 65 °C at a rate of 4 °C/min (1 hr at extremes)
Altitude (Barometric Pressure)	ANSI/ASAE EP455 5.2	101.3 kPa to 18.6 kPa
Sand and Dust	SAE J1455	
Solar Radiation	ISO 4892-2	Method B
Wash Down	ANSI/ASAE EP455 5.6	Level 2
Humidity	ANSI/ASAE EP455 5.13	96% humidity at 35 °C for 240 hrs
Salt Fog	ANSI/ASAE EP455 5.9	5% aqueous solution of NaCl at 35 °C and a pH between 6.5 and 7.2 for 48 hrs
Chemical Resistance	ISO 16750-5 EP 455 5.8.2	
Ingress Protection	IP67 front and rear	With mating connector installed

#### **Electrical Performance Specifications**

Maximum Load	ANSI/ASAE EP455 5.1.1	T(min)= -40 °C; T(max) = +65 °C				
Jump Start Voltage	EP455 5.10.2	36 V for 5 minutes; -36 V for 5 minutes				
Short Circuit Protection	EP455 5.10.4	36 V				
Reverse Polarity Protection	EP455 5.10.3	-36 V				
Starting Profile	ISO 16750-2:2006-08-01	Code C for 12 V, Code E for 24 V				
Battery-Less Operation	ANSI/ASAE EP455 5.11.3	Level 1				
Load Dump	ISO 7637-2:2004 Test Pulse 5a	Level 4				
Switching Spikes	ISO 7637-2:2004	Level 4				
Alternator Field Decay	ANSI/ASAE EP455 5.11.2					

Display: 5" color transmissive TFT LCI
--

Resolution: WVGA, 800×480 pixels, 16-bit color

Aspect Ratio: 16:9

Orientation: Landscape or Portrait

Backlighting: LED, 700 cd/m² or nits

Microprocessor: Freescale™ i.mx6, 800 MHz

Flash Memory: 4 GB eMMc

**RAM:** 512 MB DDR3

USB: 2.0 host

Real Time Clock: Internal non-rechargeable battery backup

CAN: (2) CAN 2.0 B

RS232: full duplex

Video Input: 2 NTSC/PAL

Inputs: (4) 0-32 VDC discrete digital; 10 Hz LPF

Outputs: (4) digital 200 mA switched high side

#### **Mechanical Performance**

Vibration, Random	ANSI/ASAE EP455 5.15.1	2 hrs each axis 50 Hz to 2000 Hz
Vibration, Sinusoidal	ANSI/ASAE EP455 5.15.2	A logarithmic sweep from 10 Hz to 2000 Hz to 10 Hz over a period of 20 mins for 4 hrs in each axis
Shock	ANSI/ASAE EP455 5.14	11 ms half sine pulse of 490 m/s2 in 3 axis
Drop	ANSI/ASAE EP455 5.14.2 Level 1	400 mm onto a hardwood benchtop on all practical edges.

#### **CE Compliance**

•			
EMC	EN 13309:2010	ESA	

#### **Electromagnetic Compatibility Specifications**

ESD	ANSI/ASAE EP455 5.12	Level 1 (Handling), level 2 (Powered)
Radiated Immunity	EP455 5.16	Level 1
Conducted Emissions	CISPR25	Level 3
Radiated Emissions	ISO14982	

#### **Software Development Tools**

VUI Builder	Grayhill's proprietary application for PC	Ideal for engineers that wish to quickly create common vehicle functions without coding
Qt	Cross platform development app from Digia Plc	Ideal for software developers familiar with coding for human interface applications
CODESYS	Hardware-independent auto- mation software from 3S-Smart Software Solutions GmbH	Ideal for software developers familiar with coding for human interface applications

# Easily create custom graphic icons, text boxes and active gauge elements that can monitor CAN bus parameters such as J1939.

- Applications can be developed in Grayhill's proprietary VUI Builder, Qt, or CODESYS — the most trusted cross platform development environments.
- A development kit is offered to provide the hardware and software required to set up a programmer's workstation for the use with the chosen development environment.












#### **DIMENSIONS** in millimeters [and inches]

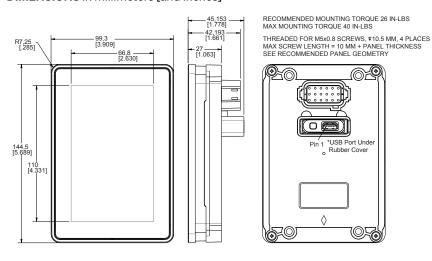

#### **RECOMMENDED MOUNTING CUT OUT**



#### **REAR CONNECTOR A & B**



Pin	Function Pin		Pin Function		Pin Function		Function	Pin	Function	Pin	Function
1	VIN Positive	2	VIN Return	3	VIN Switched	4	Digital In	5	Digital Out	6	Digital I/O
7	Digital I/O	8	Digital I/O	9	VIDEO1+	10	VIDEO1-	11	VIDEO2+	12	VIDEO2-
13	CAN1 HI	14	CAN1 LO	15	CAN2 HI	16	CAN2 LO	17	RS232Tx	18	RS232Rx

#### Mating Connector: DEUTSCH DT16-18SA-K004

#### VERSATILE DISPLAY. ORDER INFORMATION.

	RS232	USB 2.0	CAN1	CAN2	VIDE01	VIDEO2	RTC	Touch	DIG IN	DIG OUT	DIG I/O	VUI Builder	QT 4.8.6	CODESYS	Linux
3D50XX-200	Х	Х	Х						0	0	0	Х	Х		4.1.15
3D50VX-200	Х	Х	Х	Х	Х	Х	Х		1	1	3	Х	Х		4.1.15
3D50VT-200	Х	Х	Х	Х	Х	Х	Х	Х	1	1	3	Х	Х		4.1.15
3D50DEV-200	Developm	Development Kit with 3D50VT-200 display													
3D50XX-200-C	Х	Х	Х						0	0	0	Х	Х	Х	4.1.15
3D50VX-200-C	Х	Х	Х	Х	Х	Х	Х		1	1	3	Х	Х	х	4.1.15
3D50VT-200-C	Х	Х	Х	Х	Х	Х	Х	Х	1	1	3	Х	Х	X	4.1.15
3D50DEV-200-C	Developm	ent Kit with 3	BD50VT-200	-C display											

### YOUR EXPERTS IN CAB CONTROLS

Grayhill specializes in the design, development and production of human interface controls, including:

- Cab user interface design
- Customized control panels
- CAN bus interface devices