



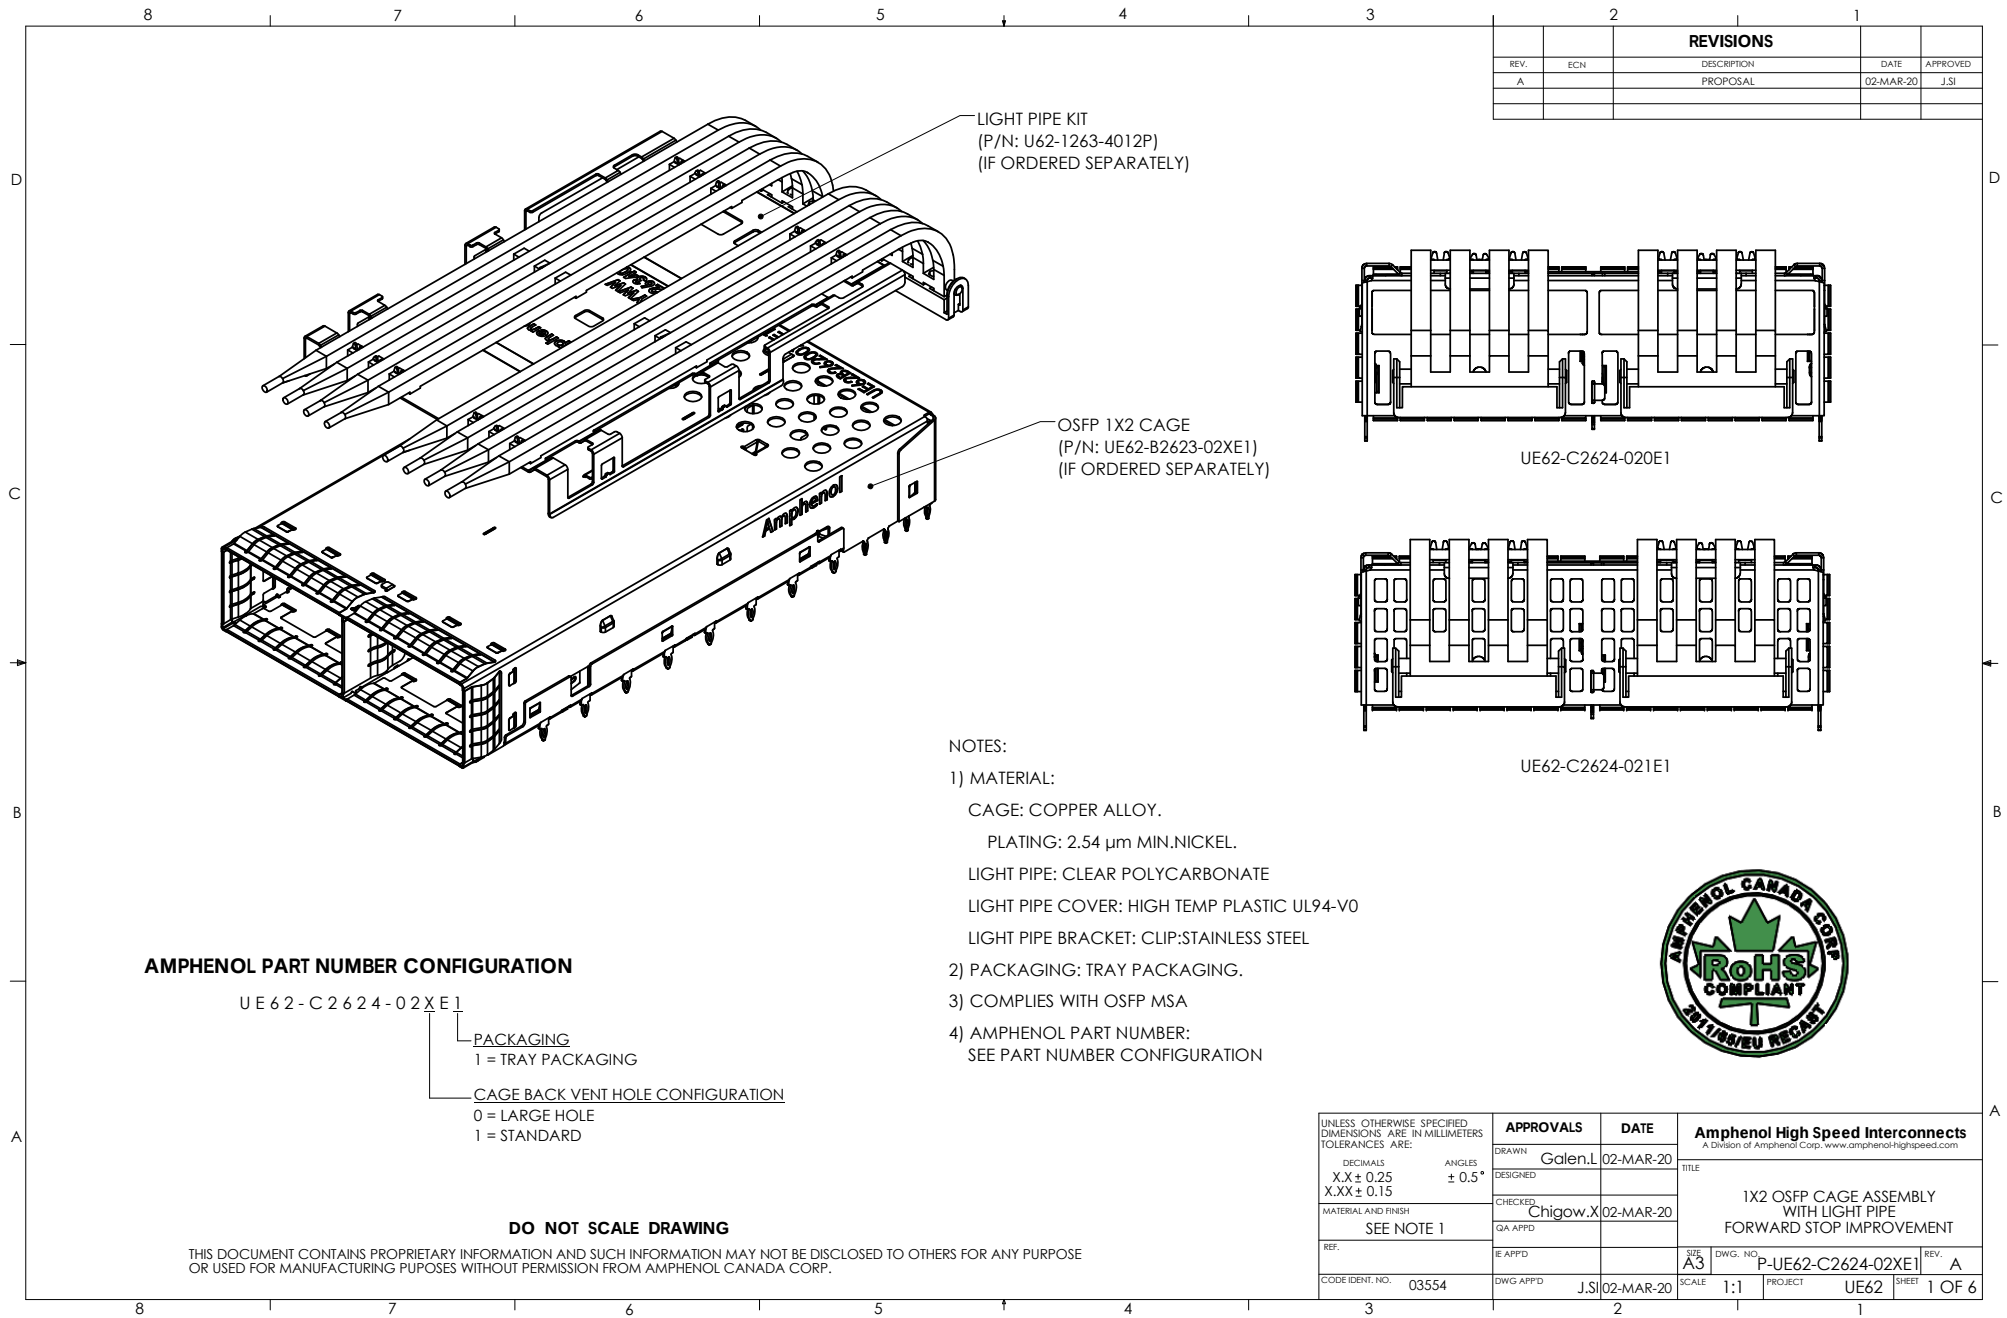


REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
A		PROPOSAL	02-MAR-20	J.SI

LIGHT PIPE KIT
(P/N: U62-1263-4012P)
(IF ORDERED SEPARATELY)

OSFP 1X2 CAGE
(P/N: UE62-B2623-02XE1)
(IF ORDERED SEPARATELY)

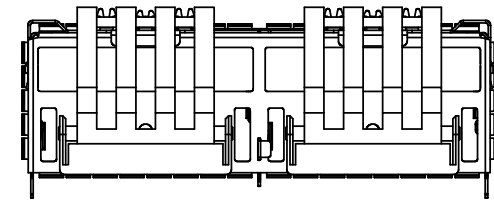

UE62-C2624-020E1

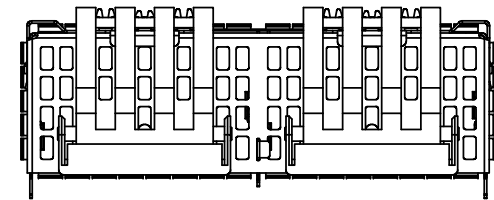

UE62-C2624-021E1

NOTES:

1) MATERIAL:

CAGE: COPPER ALLOY.

PLATING: 2.54 μ m MIN.NICKEL.

LIGHT PIPE: CLEAR POLYCARBONATE

LIGHT PIPE COVER: HIGH TEMP PLASTIC UL94-V0

LIGHT PIPE BRACKET: CLIP:STAINLESS STEEL

2) PACKAGING: TRAY PACKAGING.

3) COMPLIES WITH OSFP MSA

4) AMPHENOL PART NUMBER:
SEE PART NUMBER CONFIGURATION

AMPHENOL PART NUMBER CONFIGURATION

UE62-C2624-02XE1

PACKAGING

1 = TRAY PACKAGING

CAGE BACK VENT HOLE CONFIGURATION

0 = LARGE HOLE


1 = STANDARD


DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PUPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.





UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES X.X ± 0.25 ± 0.5° X.XX ± 0.15		APPROVALS		DATE		Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com			
		DRAWN Galen.L		02-MAR-20		TITLE 1X2 OSFP CAGE ASSEMBLY WITH LIGHT PIPE FORWARD STOP IMPROVEMENT			
		DESIGNED							
		CHECKED Chigow.X		02-MAR-20					
MATERIAL AND FINISH SEE NOTE 1		QA APPD				DWG. NO. P-UE62-C2624-02XE1 SCALE 1:1 PROJECT UE62 SHEET 1 OF 6			
REF.		E APPD							
CODE IDENT. NO. 03554		DWG APPD J.SI		02-MAR-20					

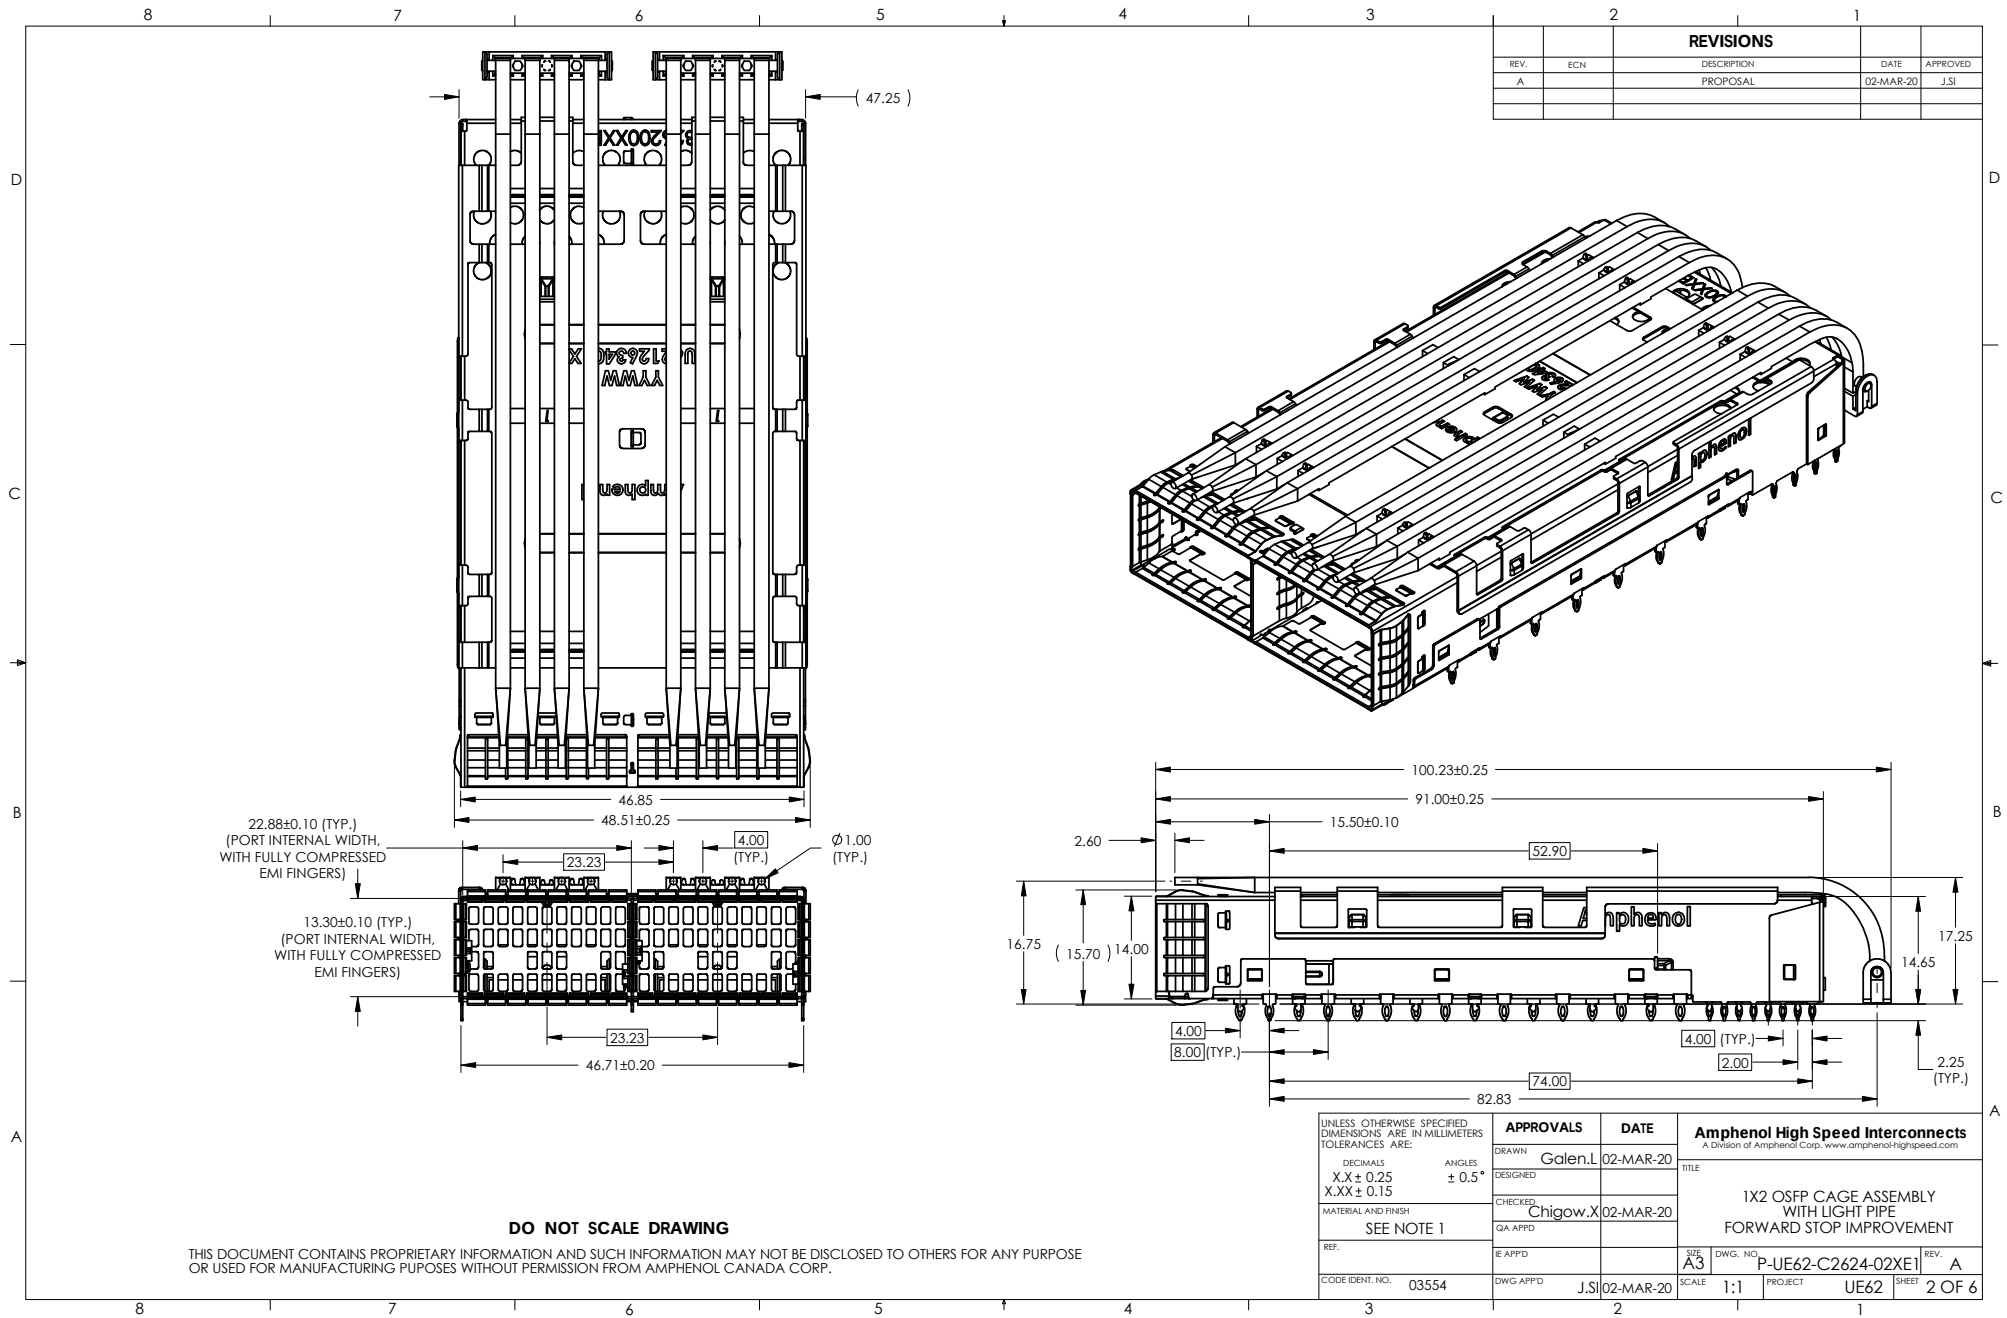


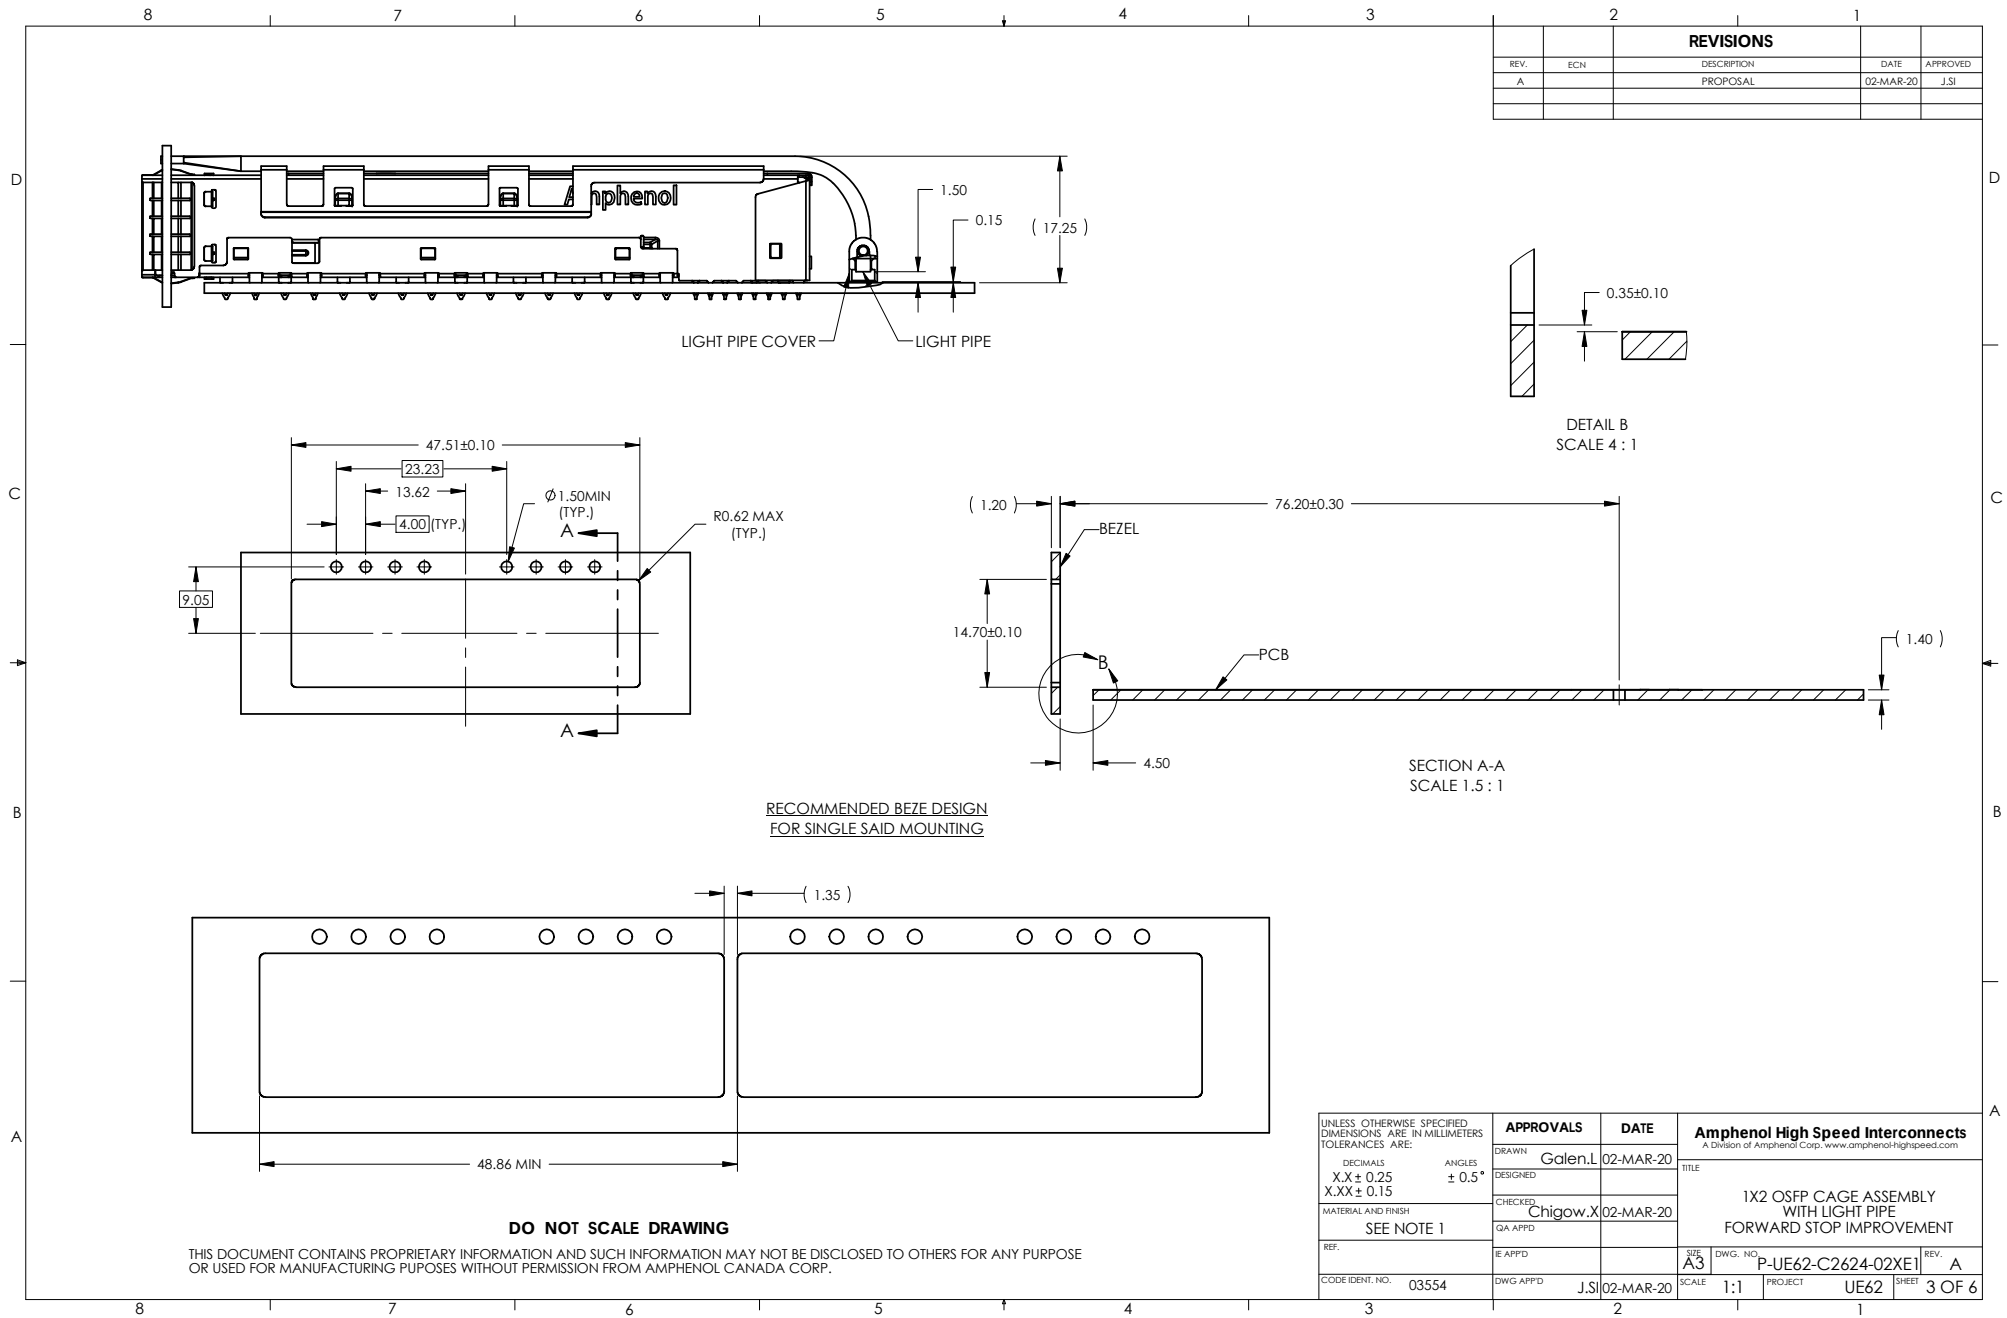

REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
A		PROPOSAL	02-MAR-20	J.SI

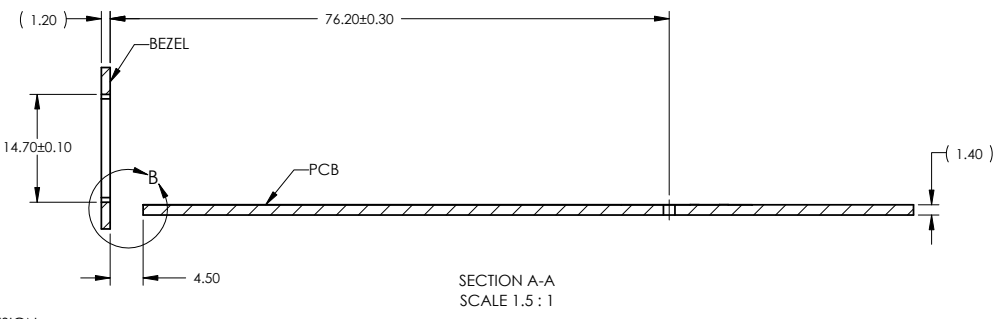


RECOMMENDED BEZE DESIGN
FOR SINGLE SAID MOUNTING

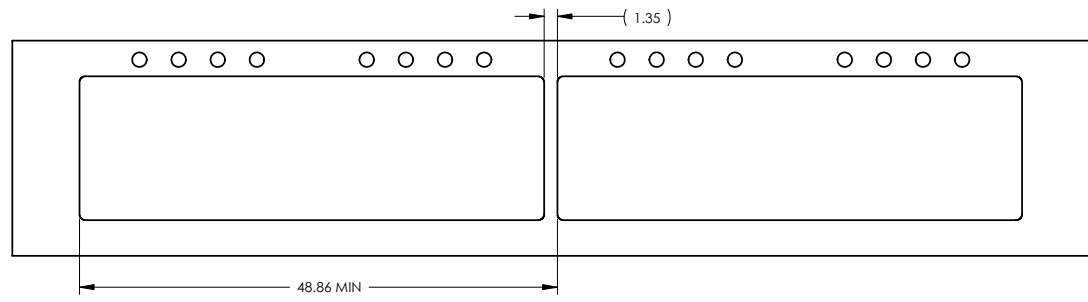

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE
OR USED FOR MANUFACTURING PUPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE:		APPROVALS		DATE		Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com	
DECIMALS XX ± 0.25 XXX ± 0.15		ANGLES ± 0.5°		DRAWN Galen.L		02-MAR-20	
MATERIAL AND FINISH SEE NOTE 1		CHECKED Chigow.X		02-MAR-20		TITLE 1X2 OSFP CAGE ASSEMBLY WITH LIGHT PIPE FORWARD STOP IMPROVEMENT	
REF.		E APPD		J.SI		02-MAR-20	
CODE IDENT. NO. 03554		DWG APPD		J.SI		02-MAR-20	
SIZE A3		SCALE 1:1		PROJECT UE62		SHEET 3 OF 6	

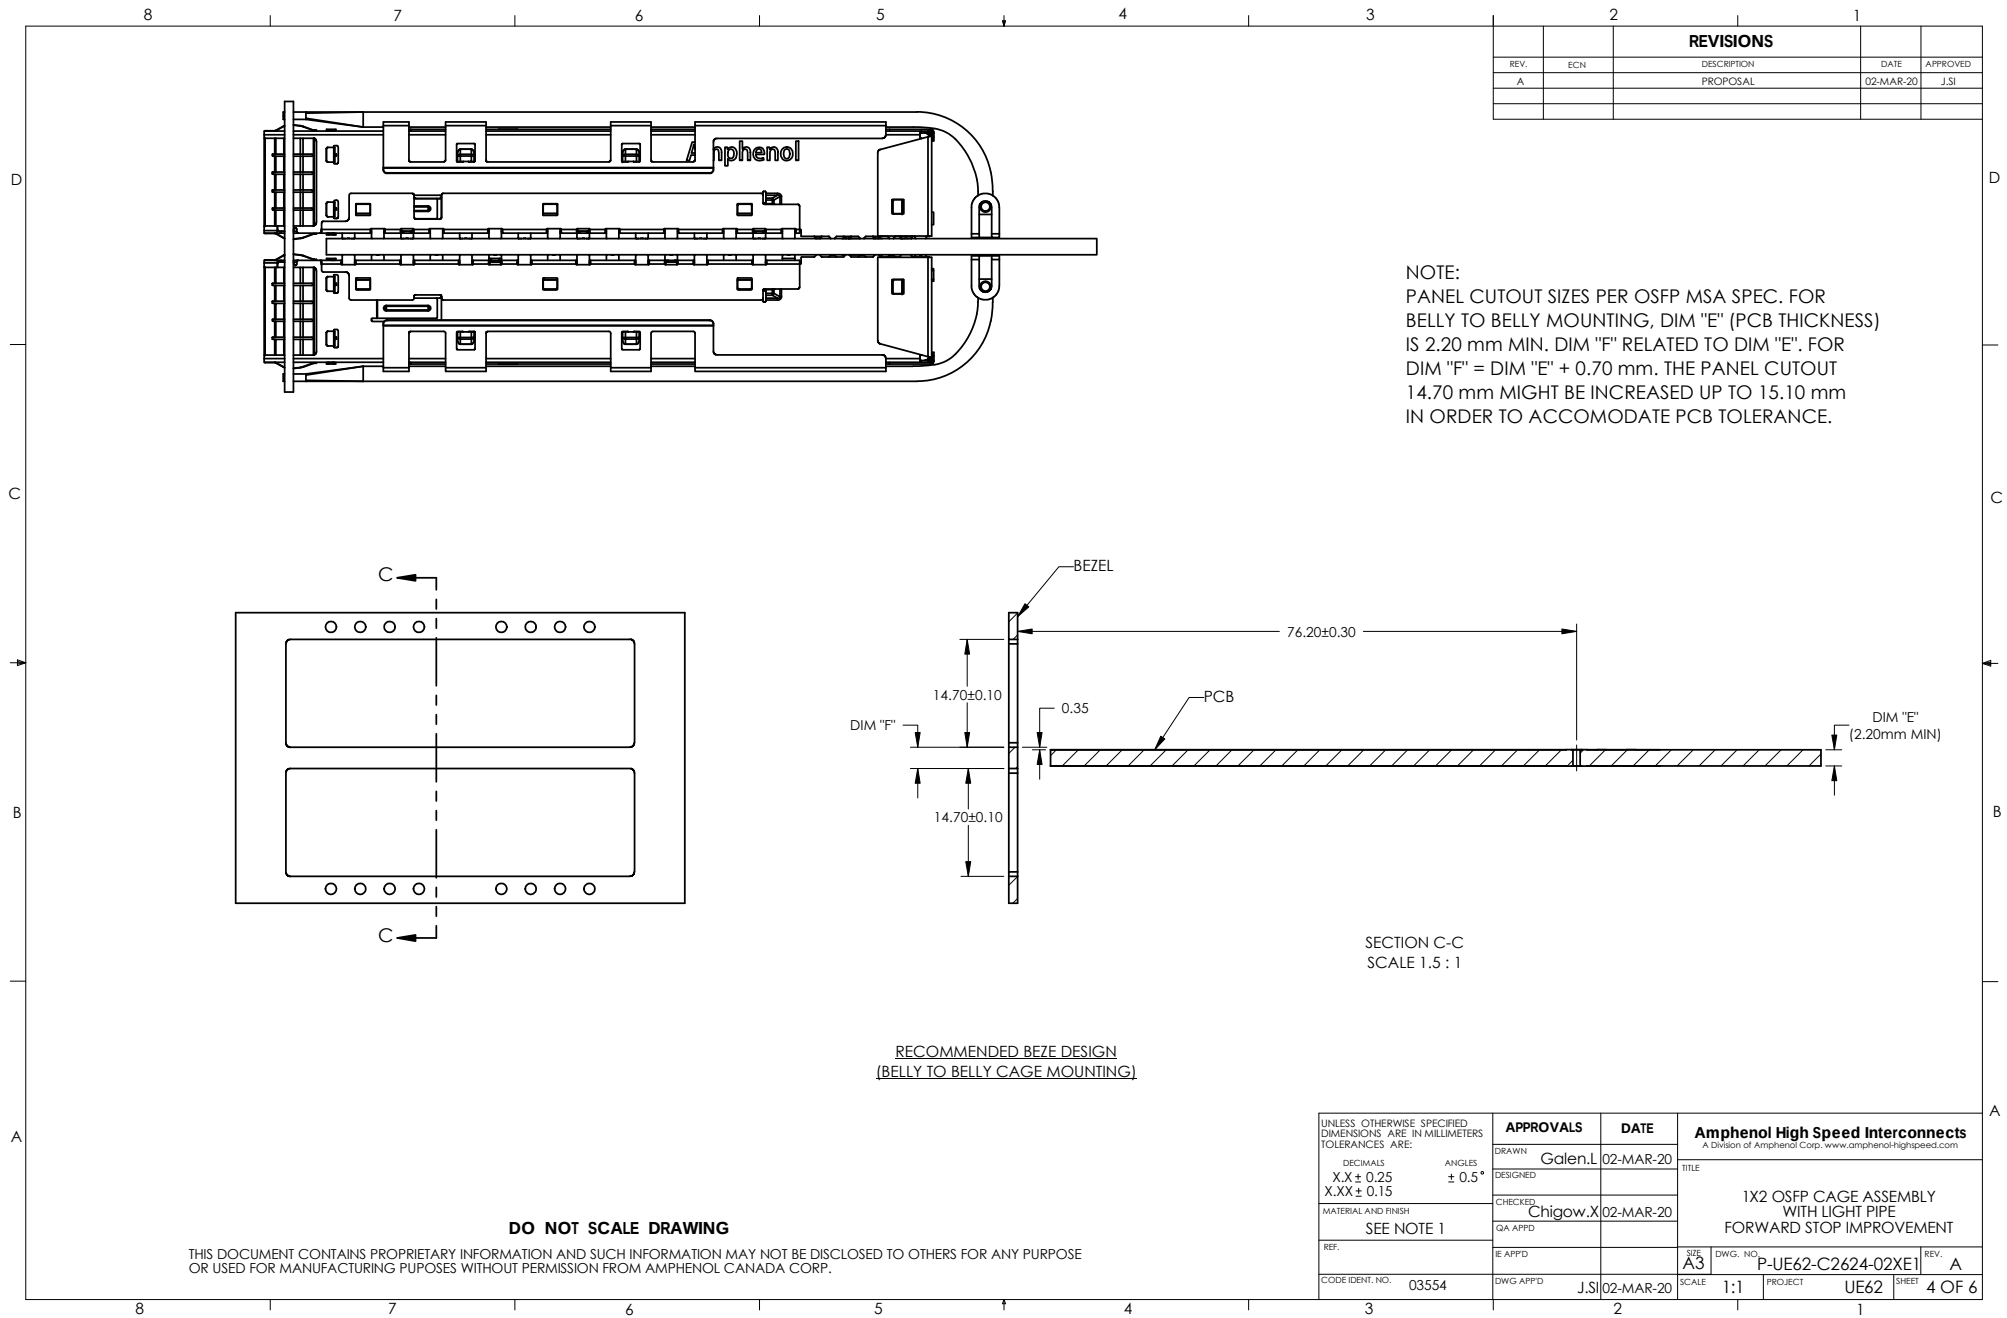

REVISIONS				
REV.	ECN	DESCRIPTION	DATE	APPROVED
A		PROPOSAL	02-MAR-20	J.SI

NOTE:
PANEL CUTOUT SIZES PER OSFP MSA SPEC. FOR BELLY TO BELLY MOUNTING, DIM "E" (PCB THICKNESS) IS 2.20 mm MIN. DIM "F" RELATED TO DIM "E". FOR DIM "F" = DIM "E" + 0.70 mm. THE PANEL CUTOUT 14.70 mm MIGHT BE INCREASED UP TO 15.10 mm IN ORDER TO ACCOMMODATE PCB TOLERANCE.

RECOMMENDED BEZE DESIGN
(BELLY TO BELLY CAGE MOUNTING)

SECTION C-C
SCALE 1.5 : 1

DO NOT SCALE DRAWING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PUPOSES WITHOUT PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES XX ± 0.25 ± 0.5° XXX ± 0.15		APPROVALS DATE		Amphenol High Speed Interconnects A Division of Amphenol Corp. www.amphenol-highspeed.com	
DRAWN Galen.L		02-MAR-20		TITLE	
DESIGNED				1X2 OSFP CAGE ASSEMBLY WITH LIGHT PIPE FORWARD STOP IMPROVEMENT	
CHECKED Chigow.X		02-MAR-20		REV. A	
MATERIAL AND FINISH SEE NOTE 1		QA APPD		SIZE A3	
REF.		E APPD		DWG. NO. P-UE62-C2624-02XE1	
CODE IDENT. NO. 03554		J.SI 02-MAR-20		SCALE 1:1	
				PROJECT UE62	
				SHEET 4 OF 6	

