



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	11/29/2022	GUTTADAURO

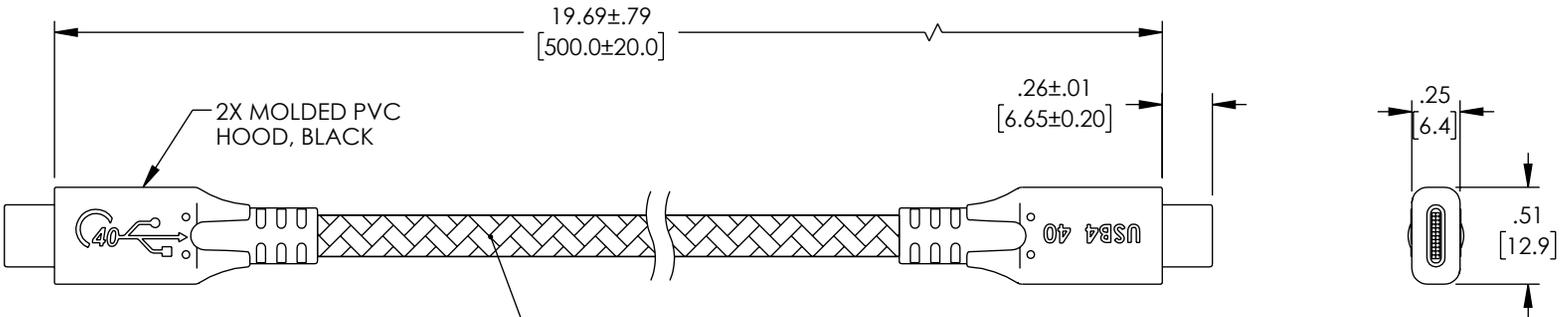

P1
USB TYPE C
MALE CONNECTOR
NICKEL PLATED

P2
USB TYPE C
MALE CONNECTOR
NICKEL PLATED
WITH INTERNAL
I.C. CHIP

4 PAIR 32AWG INDIVIDUALLY SHIELDED TINNED COPPER WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE
1 PAIR 32AWG STRANDED TINNED COPPER
4 CONDUCTOR 32AWG STRANDED TINNED COPPER
1 CONDUCTOR 23AWG STRANDED TINNED COPPER
OVERALL ALUM/POLY FOIL SHIELD, OVERALL BRAID SHIELD PLUS 2 TINNED COPPER DRAIN WIRES
JACKET: BLACK PVC WITH BLACK NYLON BRAID

WIRING MAP		
P1		P2
A2		B11
A3		B10
B11		A2
B10		A3
A10		B3
A11		B2
B3		A10
B2		A11
A5		A5
B5		B5
B8		A8
A8		B8
A6		A6
A7		A7
A1, B1, A12, B12 SHELL		A1, B1, A12, B12 SHELL
A4, B4, A9, B9		A4, B4, A9, B9

NOTES:

- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- PASS 100W (20V5A) 40G 4K@60Hz 5K@60Hz 8K@60Hz TEST.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [1.3]	APPROVALS DRAWN BY DFRISIELLO CHECKED BY RCARLESCO APPROVED BY GUTTADAURO	DATE 11/29/2022 11/29/2022 11/29/2022	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY USB	
THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321
		ITEM NO. CAU4CC-40P-05M	REV. A
		SCALE: NONE	CAD FILE: CAU4CC-40P-05M.SLDDRW
		SHEET 1 OF 1	